


# KELOX

## KMU489 ?KELOX-ULTRAX STEELFIX adaptor 16/10

53272B34

### Areas of application

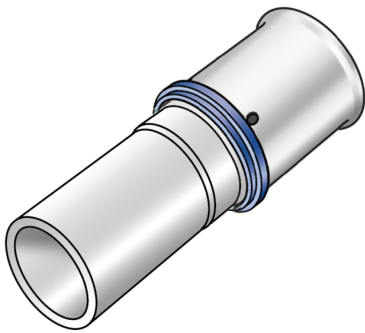

?Press-adaptor straight from Steelfix, Copperfix pipe size to KELOX-ULTRAX - press-socket made from non-porous metal-plated red brass, incl. support sleeves with O-rings and steel or stainless steel press-sleeves, d16-32mm, "leak before pressed"

ATTENTION! Connection to pipe end only suitable as a screw or press-connection!

## Approvals:



# Specifications

## Article information


port 1	Pressing socket
execution	1-part
design	Straight
press contour	U

## Technical properties

maximum working pressure at 20 ° C	10
------------------------------------	----

## Product information

VPE1	10 SA1
VPE2	160 KT1
weight	0,025 KGM
text	?KELOX-ULTRAX STEELFIX adaptor
INTRNR	74122000
main material group	KELOX
material group	KELOX-ULTRAX metal fittings
code	KMU489

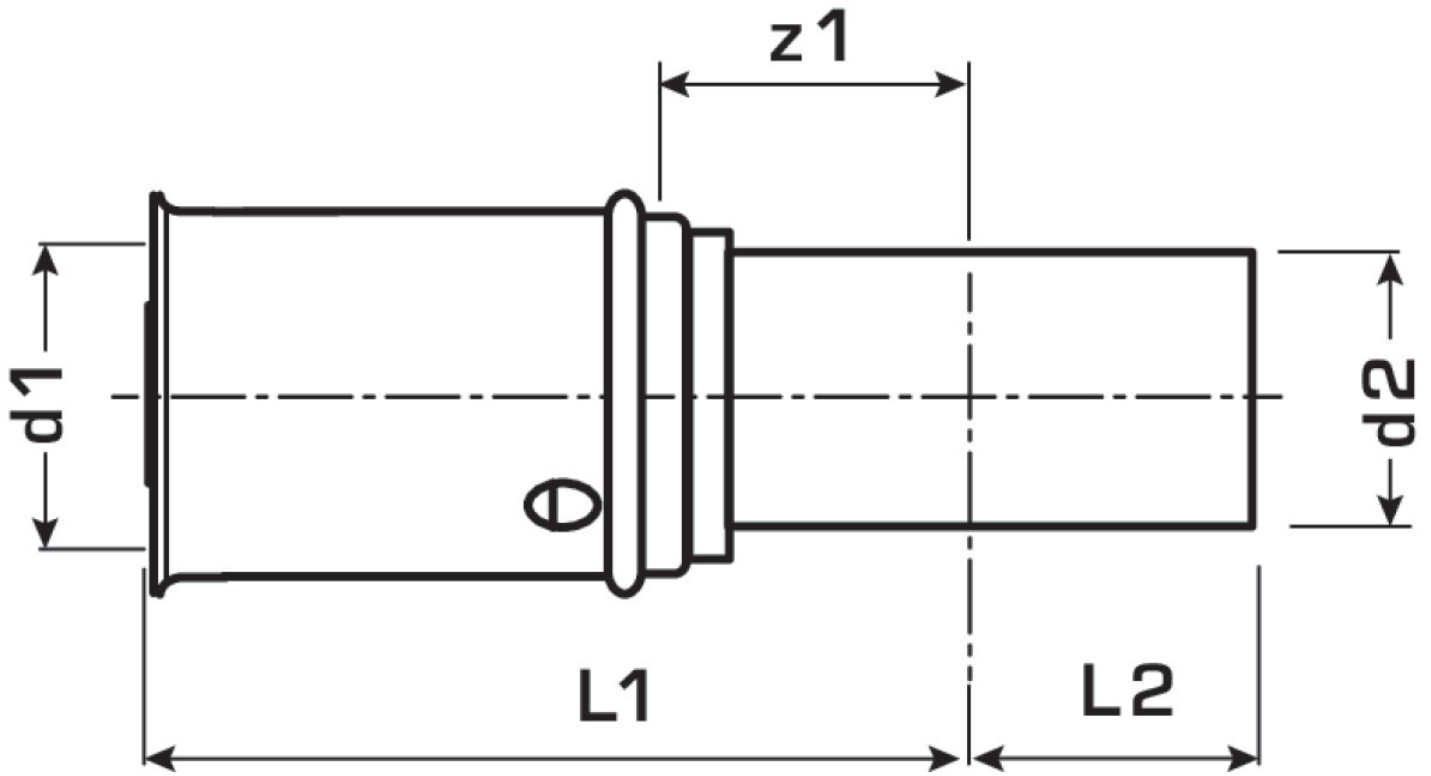

Art. No	label	d1 mm	d2 mm	L1 mm	L2 mm	z1 mm
53272B34	16/10	16	10	35	10	6.5