


# KELOX

## KMU489 ?KELOX-ULTRAX STEELFIX adaptor 16/15

53272BB0

### Areas of application

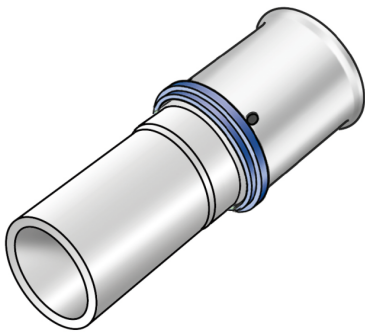

?Press-adaptor straight from Steelfix, Copperfix pipe size to KELOX-ULTRAX - press-socket made from non-porous metal-plated red brass, incl. support sleeves with O-rings and steel or stainless steel press-sleeves, d16-32mm, "leak before pressed"

ATTENTION! Connection to pipe end only suitable as a screw or press-connection!

## Approvals:



# Specifications

## Article information


port 1	Pressing socket
execution	1-part
design	Straight
press contour	U

## Technical properties

maximum working pressure at 20 ° C	10
------------------------------------	----

## Product information

VPE1	10 SA1
VPE2	160 KT1
weight	0,03 KGM
text	?KELOX-ULTRAX STEELFIX adaptor
INTRNR	74122000
main material group	KELOX
material group	KELOX-ULTRAX metal fittings
code	KMU489

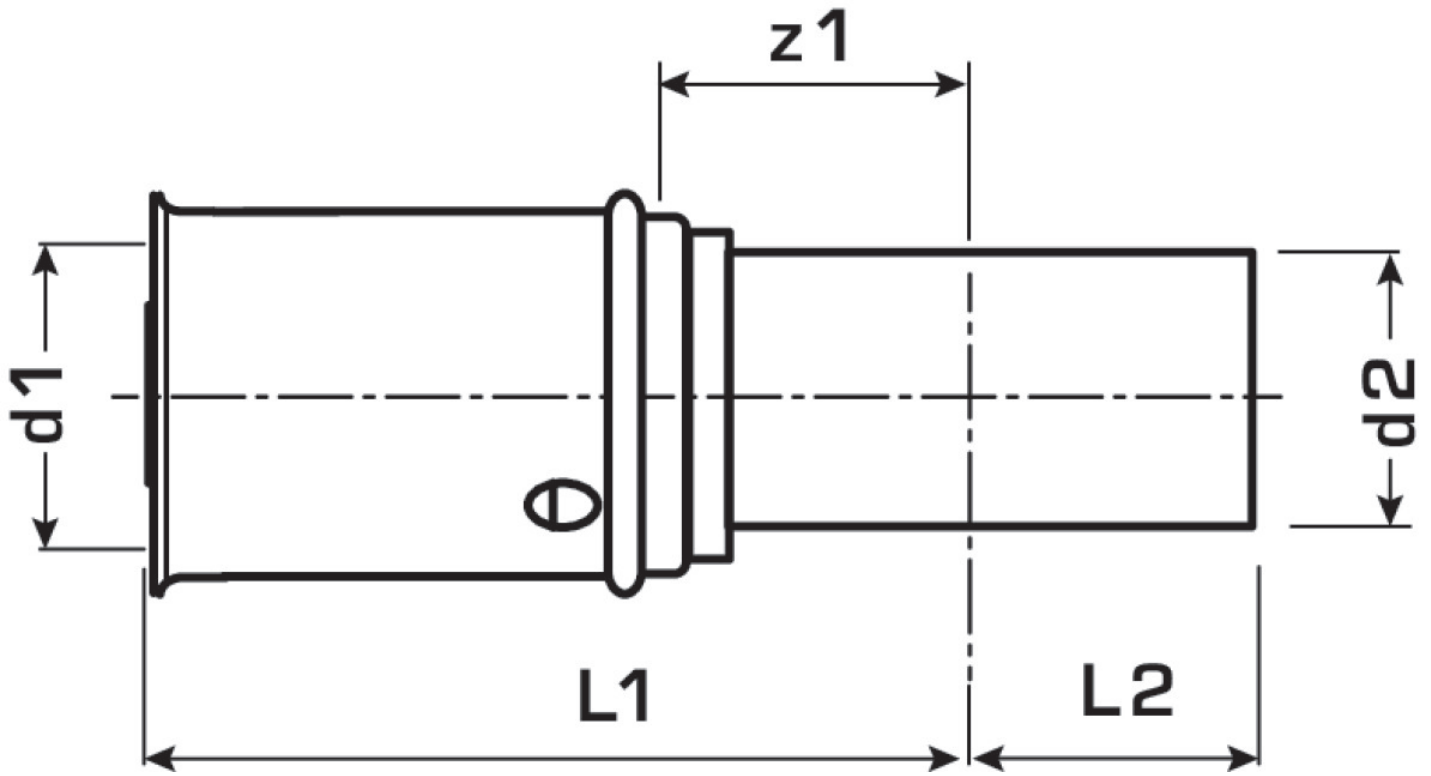

Art. No	label	d1 mm	d2	L1	L2 mm	z1
53272BB0	16/15	16	15	35	20	12.5