


# STEELOX

## SMX100 STEELOX multilayer composite pipe 25x2.5

57001E00

### Areas of application

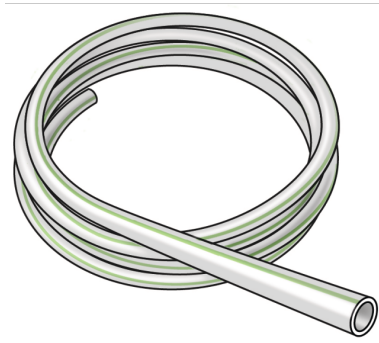

STEELOX pipe conforming to ÖNORM B 5175, oxygen- and steam diffusion-tight multi-layer composite pipe made of stainless steel/PE-RT

Classification of operating conditions as per ÖNORM B 5175 - Class 2:

70°C/10 bar, max. operating temperature up to 80°C - accident temperature 100°C (max. 100h)

Colour: silver with green longitudinal stripes

Rolls

## Approvals:



# Specifications

## Article information


color	Silver with green longitudinal stripes
flexible	Yes
trade length	50 m
isolation	No

## Technical properties

maximum working pressure at 20 ° C	10 bar
pipe weight	0.22 kg/m
pipe contents	0.314 l/m
lambda pipe	0.45 W/(m.K)
wall rawness	0.01
expansion coefficient	0.045 mm/(m.K)

## Product information

VPE1	50 ROL
VPE2	700 PAL
L	50 m
weight	0,22 KGM
text	STEELOX multilayer composite pipe
INTRNR	39173900
code	SMX100

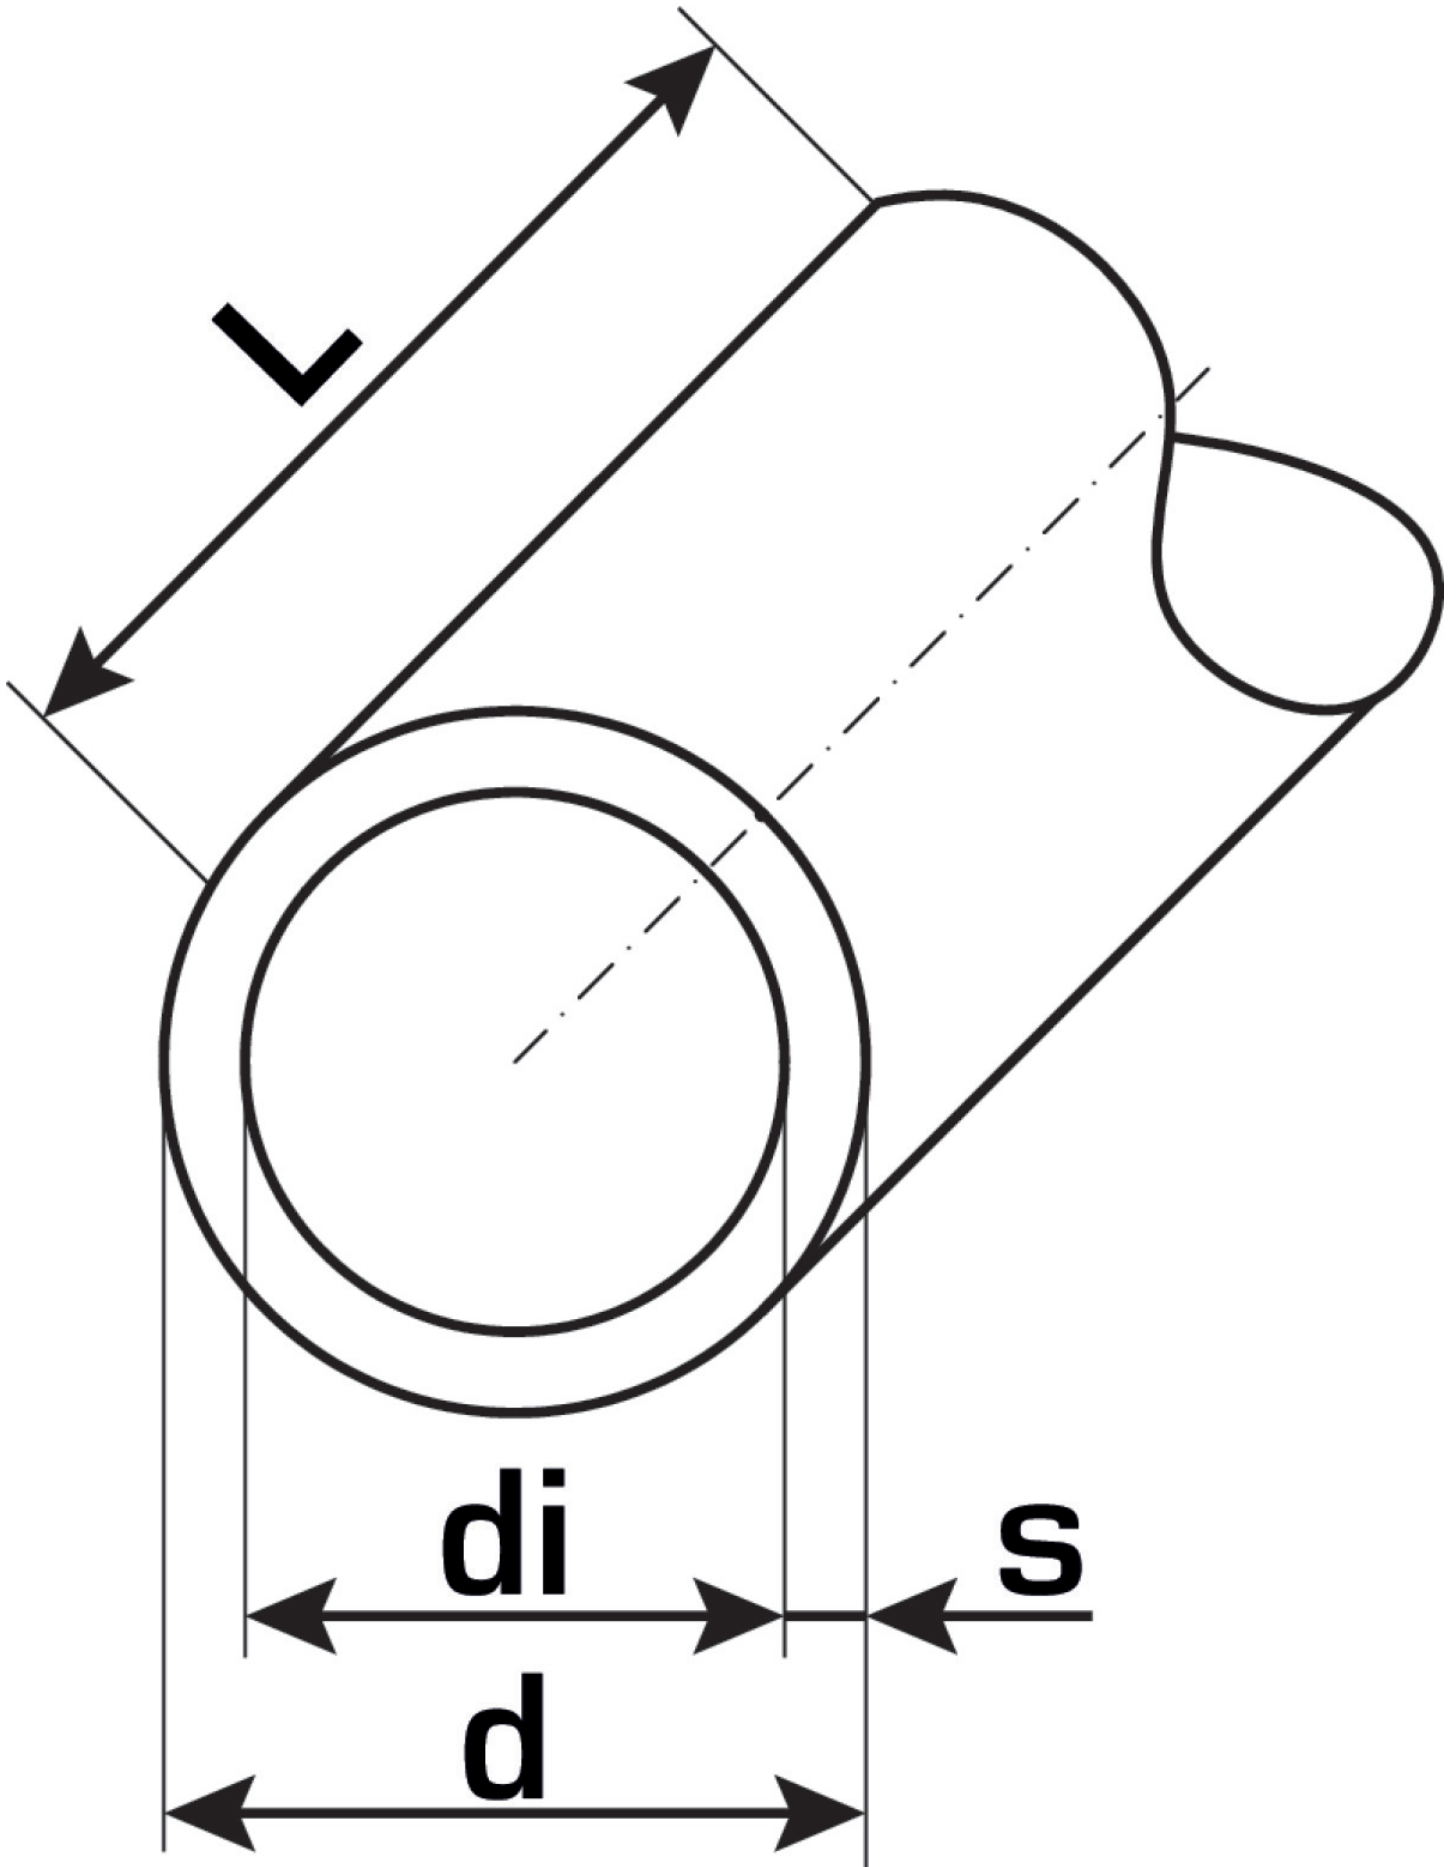

Art. No	label	d1	pipe contents l/m	s
57001E00	25x2.5	25	0.314	2.5



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)