


# STEELOX

## SMX450 ?STEELOX adapter with male thread 25x3/4"

57202E04

### Areas of application

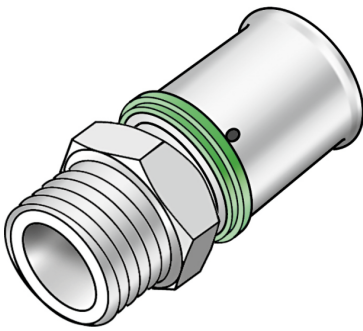

?Press-fit adapter with male thread for sealing, made of non-porous metallized dezincification-resistant (DZR) brass, incl. support sleeves with O-rings and stainless steel pressing sleeves, "leak before pressed"

### Approvals:



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

# Specifications

## Article information


port 1	Pressing socket
port 2	Male thread, conical (NPT)
execution	1-part
design	Straight
press contour	SX

## Technical properties

maximum working pressure at 20 ° C	10 bar
------------------------------------	--------

## Product information

VPE1	10 SA1
VPE2	100 KT1
weight	0,117 KGM
text	?STEELOX adapter with male thread
INTRNR	74122000
code	SMX450

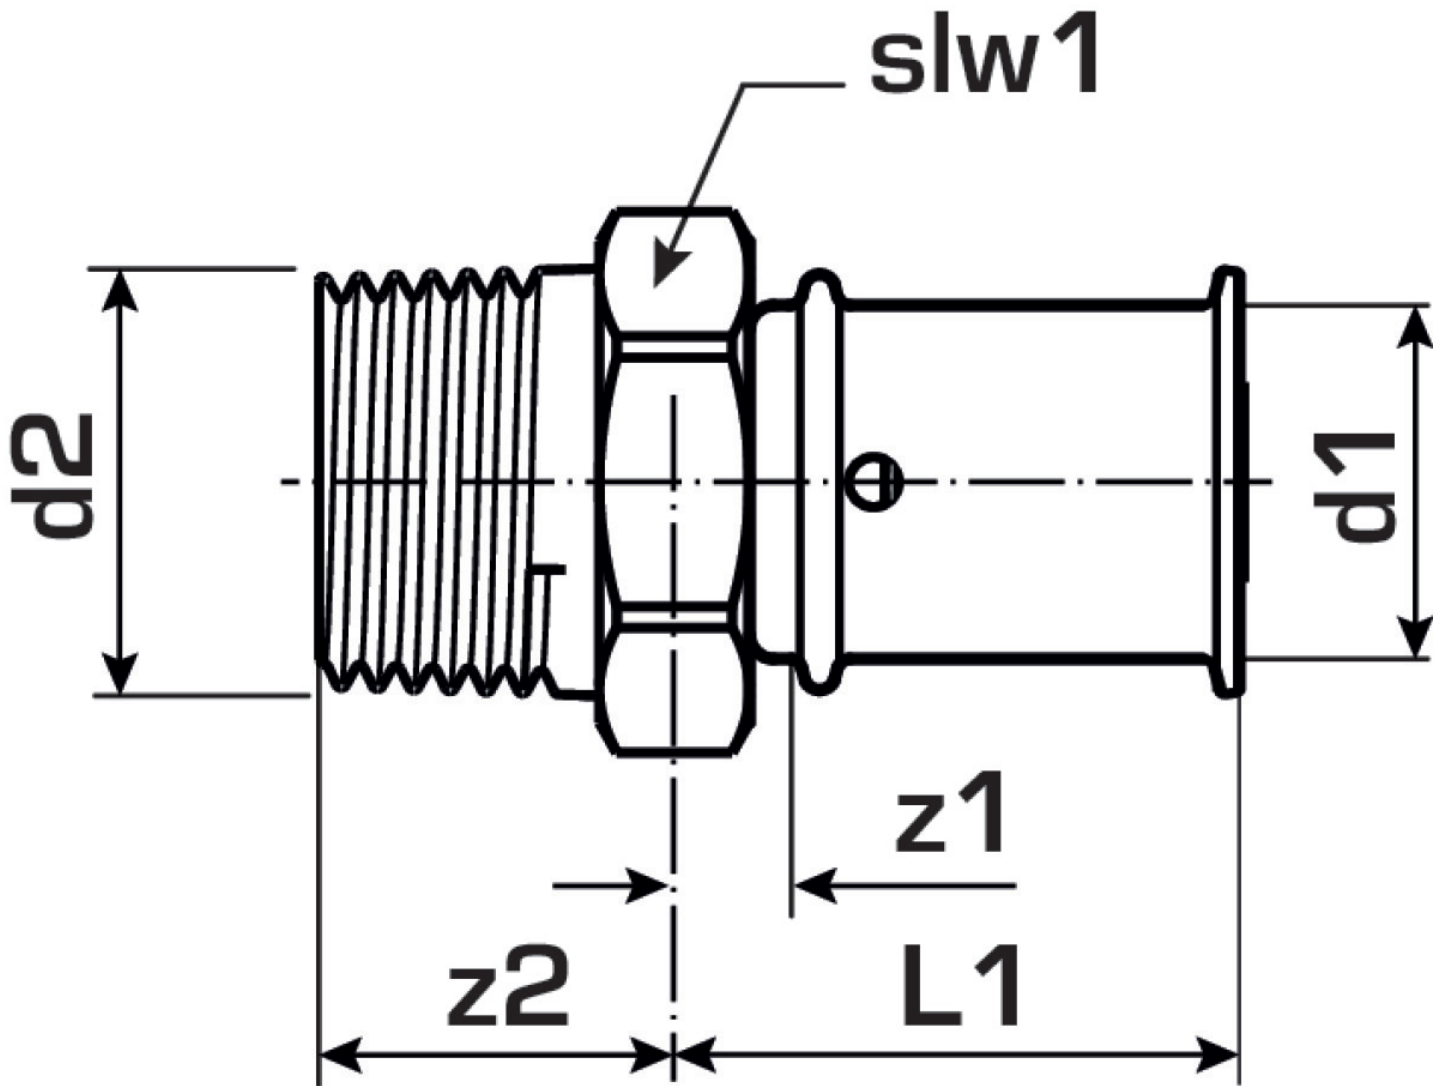

Art. No	label	d2 Inches	d1	L1	z1	z2	slw1
57202E04	25x3/4"	3/4" (20)	25	38	5	25	30