


KETRIX

TRI02 KETRIX industrial pipe - PN10 50x4.6

55002H00

Areas of application

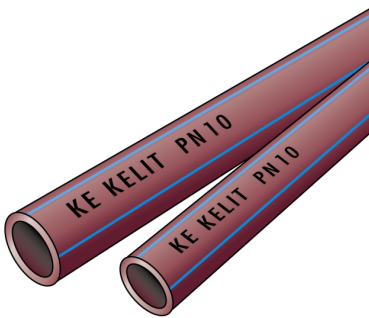

KETRIX industrial piping system based on ÖNORM EN ISO 15874 made of polyolefin blend (POB) for COOLING WATER and COLD

Area of application: 20°C/10 bar, from -30°C to +30°C/8 bar

Colour: burgundy with 3 co-extruded blue longitudinal stripes

Length: 4m

Specifications

Article information

| | |
|--------|----------|
| port 1 | Pipe end |
| port 2 | Pipe end |
| color | Burgundy |

Technical properties

| | |
|-----------------------|---------------|
| pipe weight | 0.64 kg/m |
| pipe contents | 1.31 l/m |
| PN | PN 10 |
| lambda pipe | 0.24 W/(m.K) |
| wall rawness | 0.007 |
| expansion coefficient | 0.14 mm/(m.K) |

Product information

| | |
|---------------------|-------------------------------|
| DIM2 | 40,8 |
| VPE1 | 20 BND |
| L | 4 m |
| weight | 0,64 KGM |
| text | KETRIX industrial pipe - PN10 |
| INTRNR | 39172290 |
| main material group | KETRIX |
| material group | KETRIX pipes |
| code | TRI02 |



| Art. No | label | d1 | pipe contents l/m | s |
|----------|--------|----|-------------------|-----|
| 55002H00 | 50x4.6 | 50 | 1.31 | 4.6 |



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com