


KETRIX

TRI36 KETRIX tee reduced in the flow 32/20/25

55118FDE

Areas of application

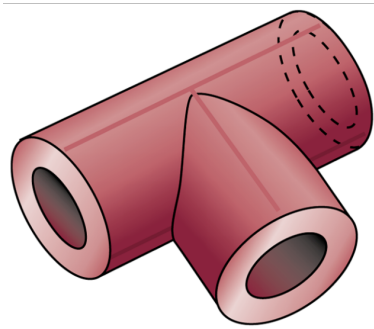

KETRIX polyfusion weld fitting for connecting POB pipes to fittings made of the same material without narrowing the cross section

Specifications

Technical properties

maximum working pressure at 20 ° C 16 bar

Product information

VPE1 5 SA1

VPE2 30 KT1

VPE3 180 KT2

VPE4 2880 PAL

weight 0,099 KGM


text KETRIX tee reduced in the flow

INTRNR 39174000

main material group KETRIX

material group KETRIX plastic fittings

code TRI36

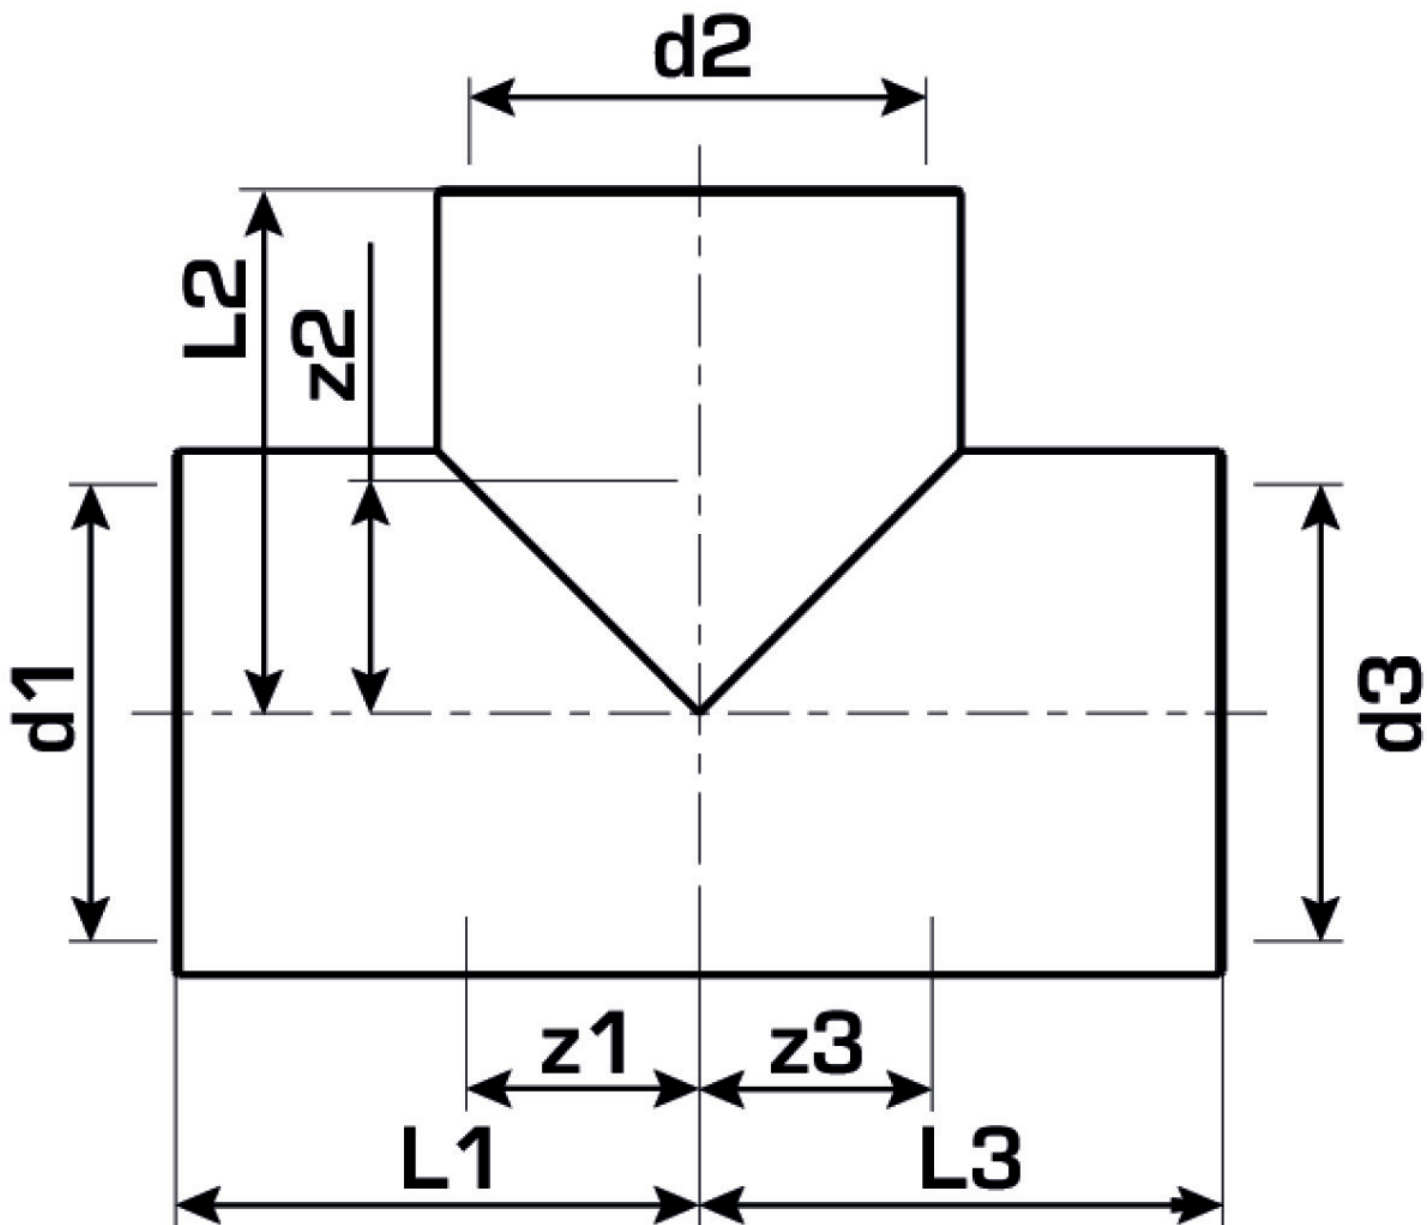

| Art. No | label |
|----------|----------|
| 55118FDE | 32/20/25 |