


KELOX-ULTRAX FB plus pipe - 9mm 16x2

7001162

Areas of application

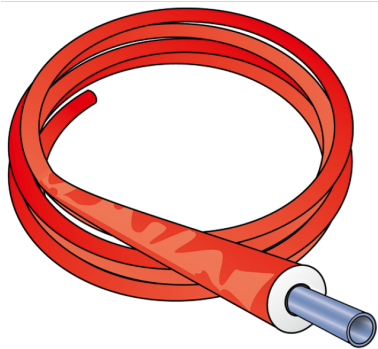

KELOX-ULTRAX FB Plus pipe conforming to ÖNORM EN ISO 21003; oxygen- and water vapour-tight

5-layer multilayer pipe made of PE-RT/Al/ PE-RT; 9mm closed-cell soft foam insulation applied at the factory and plastic insulation protective sleeve made of viscoplastic PE foil

Classification of operating conditions according to ÖNORM EN ISO 21003

Underfloor heating - Class 4: 60°C - tmax 70°C/10 bar

Insulation thickness: 9mm

Colour: red

Supplied in coils

Approvals:



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

Specifications

Article information

color Blue

colour isolation Red

Technical properties

maximum working pressure at 20 ° C 10


thick thermal insulation 9

pipe weight 0.11

lambda pipe 0.45

Product information

text KELOX-ULTRAX FB plus pipe - 9mm

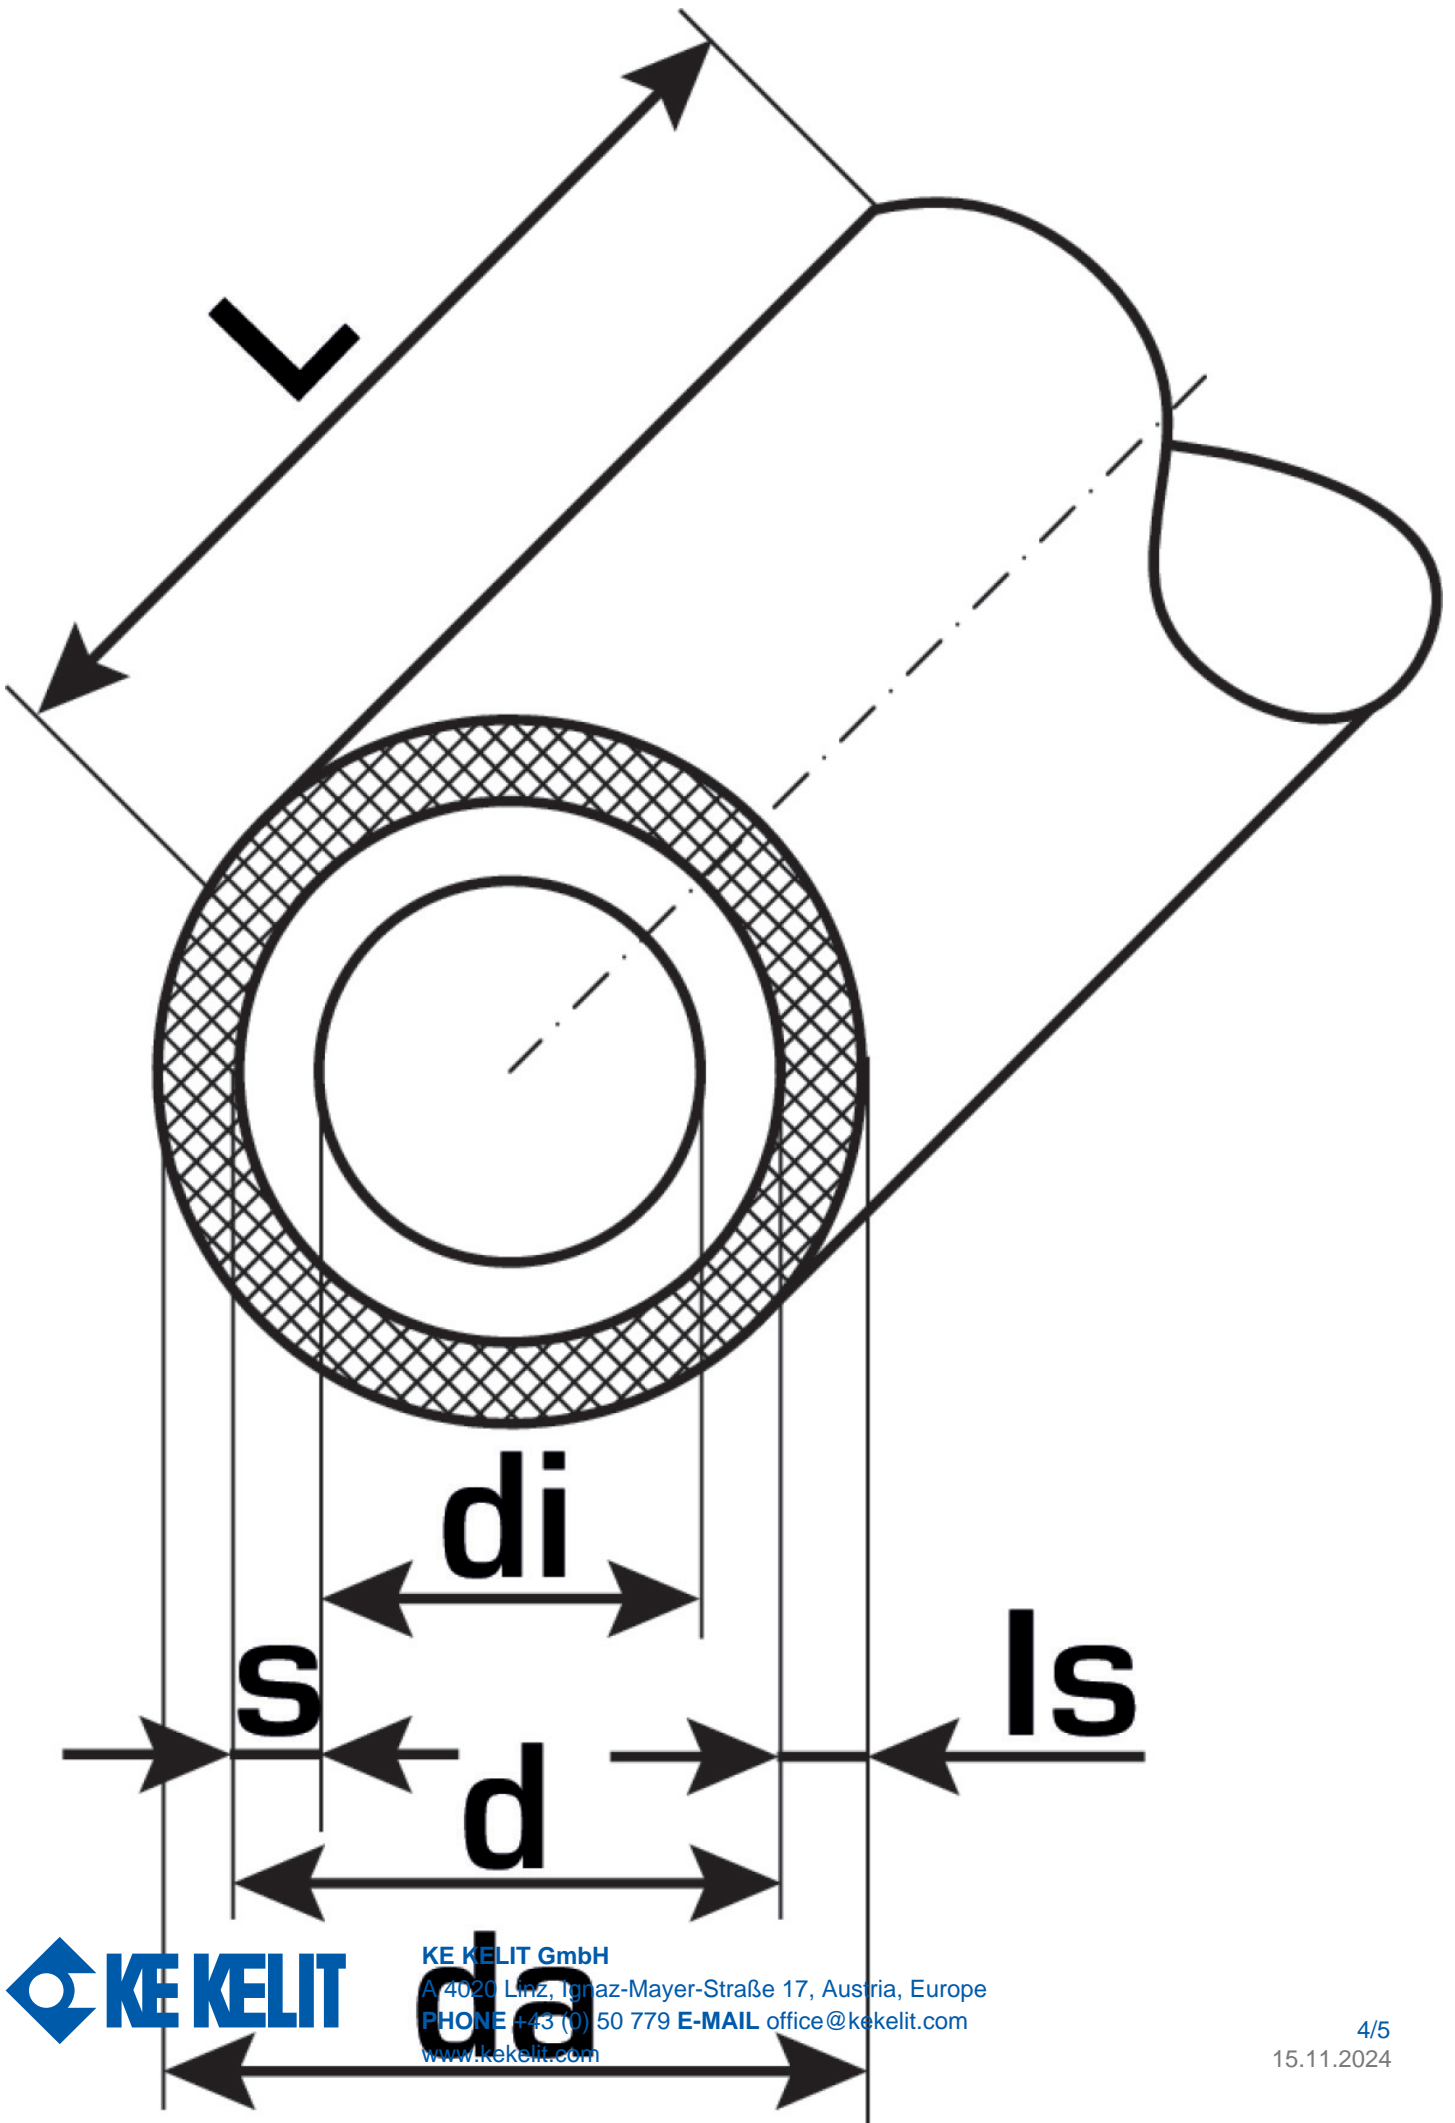

Art. No	label	s
7001162	16x2	2



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com