


# KELOX<sub>FB</sub>

KELOX FB manifold 5 L: 325mm

7905500

## Areas of application



Feed and return flow bar with heating circuit outlets 3/4" euro cone with male thread, with bleeding at the highest point and draining, manifold ends closed, connections with pre-formed union nut 1" flat-sealing, manifold ends with 1" male thread, for screwing together individual manifold bars without additional connectors, on the feed line, pre-settable double-spindle valve, valve bonnets to fit KM596 KELOX thermal motor, on the return flow water flow meter (0.5-2.5 l/min), non-porous metallized brass, incl. labelled plates for each heating circuit and sound-insulated metal consoles (1 circuit) without drain outlet, bleeding and metal console

Area of application: tmax. 80°C/6 bar

ATTENTION - WITHOUT KM220 Euro thread fitting!

# Specifications

## Product information

text

KELOX FB manifold




**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

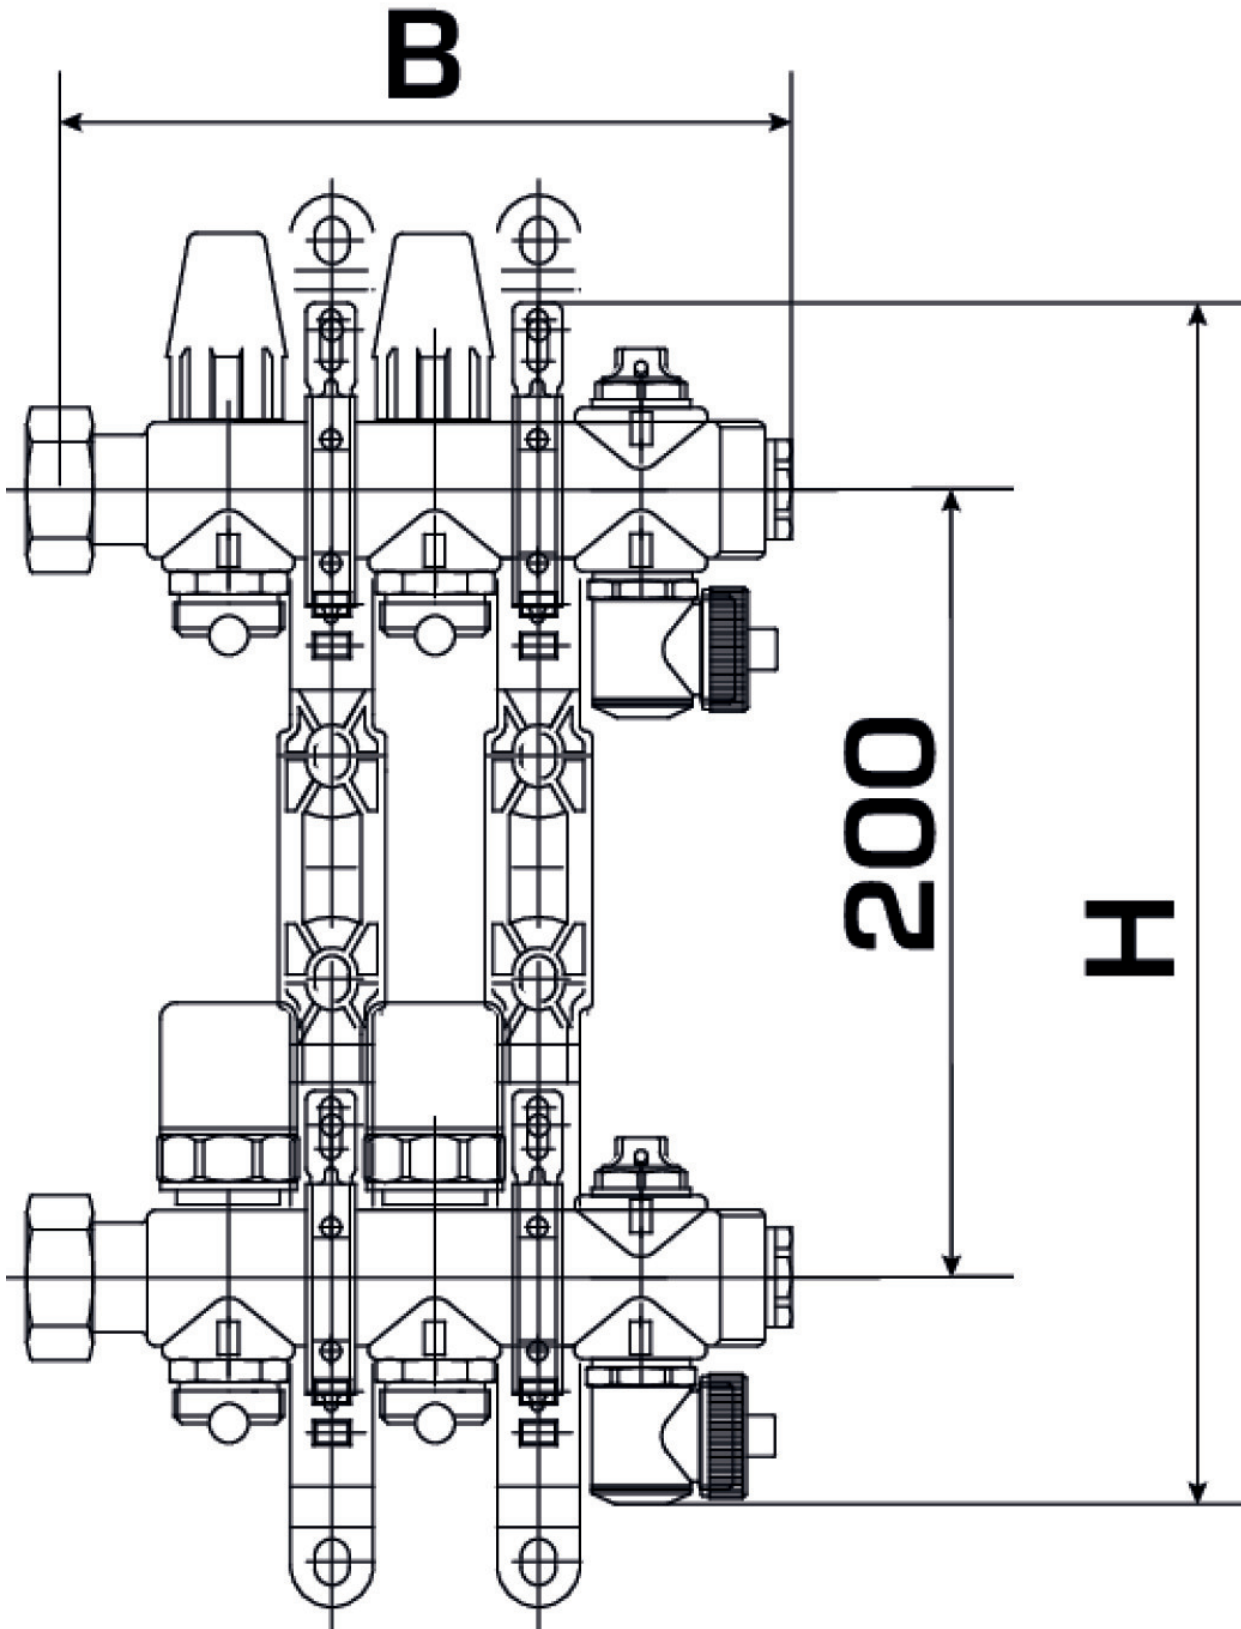

Art. No	label	t	t	h
7905500	5 L: 325mm	80	326	305



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)