


KELOX_{FB}

KELOX FB Velcro roll - S 30/2 roll 6.5kN

6060530

Areas of application

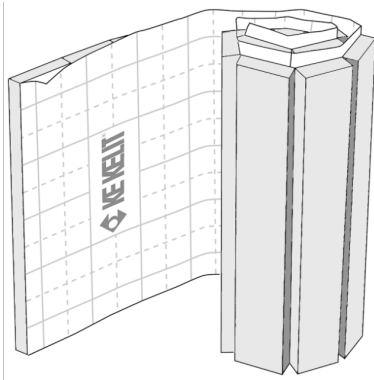

Expanded polystyrene complying with ÖNORM B 6000, HFC- and CFC-free, laminated velour fabric with PE coating, incl. adhesive overlap edge for fixing the KELOX-ULTRAX FB and ULTRA PE-RT Velcro tubes without additional fastening

Thickness: 30mm

Load-bearing capacity: max. 6.5 kN/m² - EPS-T 650 - Dynamic rigidity Load-bearing capacity: max. 10 kN/m² - EPS-T 1000 - Dynamic rigidity Footfall sound attenuation according to ÖNORM B 8115-4 with screeding mass of 100 kg/m²:

30/2 - 6.5kN - Footfall sound attenuation: 28 dB - Lambda value: 0.040 W/mK

30/2 - 10kN - Footfall sound attenuation: 27 dB - Lambda value: 0.038 W/mK

Water vapour diffusion resistance: 250,000 My

Compressibility: 2mm



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL office@kekelit.com

www.kekelit.com

Coiled product: 10x1m

ATTENTION: Protect from direct sunlight, do not store outdoors!

Max. storage temperature 40°C!



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

Specifications

Product information

text KELOX FB Velcro roll - S

Art. No

6060530

label

30/2 roll 6.5kN



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com