


KELOX_{FB}

KELOX dry system element 12,5

6103010

Areas of application

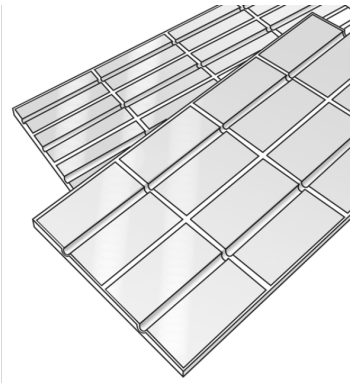

System element made from polystyrene EPS 035 DEO, 240 kPa, with 0.5 mm aluminium heat conduction plate laminated over the full surface area at the factory and omega-shaped flanged pipe channels to effectively enclose the KELOX-ULTRAX FB pipe, incl. rupture joints for exact-fitting over the full surface area of premises

VA: 12.5cm or 25cm

L: 1000mm, W: 500mm, H: 30mm

ATTENTION: to improve pressure stability, use wooden frame KM683!

Specifications

Product information

text KELOX dry system element

Art. No	label
---------	-------

6103010	12,5
---------	------



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com