


# KELOX<sub>FB</sub>

KM694K KELOX wireless room thermostat, digital  
86x86x26,5mm

5881330

## Areas of application

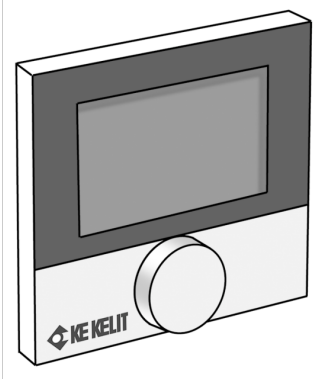

Surface-mount digital wireless room thermostat with backlit display as a signal transmitter to the KM695B bus wireless receiver and, in addition, to control 24V thermal motors; can also be used for programming the KM695B receiver; KM699 floor sensor can be connected

Hysteresis: +/- 0.3 K

Contact: 1 NCC

Setting range: 5°C - 30°C

Protection type/class: IP 20

Wireless frequency: 868 MHz

Power supply: 2xAAA Batteries (included)

Size: 86x86x26.5mm

Colour: white (RAL 9003)

**ATTENTION:** Can only be operated in conjunction with the KM695B or KM695S!



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

# Specifications

Product information	
VPE1	1,00 KT1
VPE2	50,00 KT2
weight	0,110 KGM
text	KELOX wireless room thermostat, digital
INTRNR	90321020
code	KM694K

Art. No	label
5881330	86x86x26,5mm