


KELOX_{FB}

?KELOX-ULTRAX FB manifold 2 L: 225mm

7902600

Areas of application

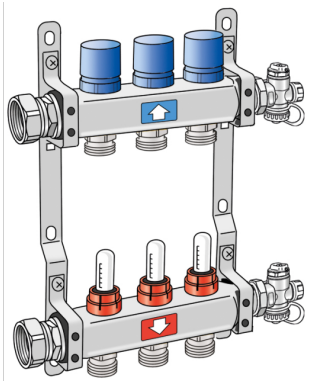

?Stainless steel flow and return flow bar with 3/4" male Euro cone heating circuit outlets, with bleeding and emptying at the manifold end, connections with screwed-in 1" flat-sealing cap nut. Return flow valve bonnet for KM596 KELOX thermal motor, feed flow water flow meter adjustable to 0.5-5.0 l/min, including soundproofed steel consoles

Application area: tmax. 70°C/6 bar


ATTENTION – WITHOUT KM220 Euro screw connection!

Specifications

Product information

text

?KELOX-ULTRAX FB manifold

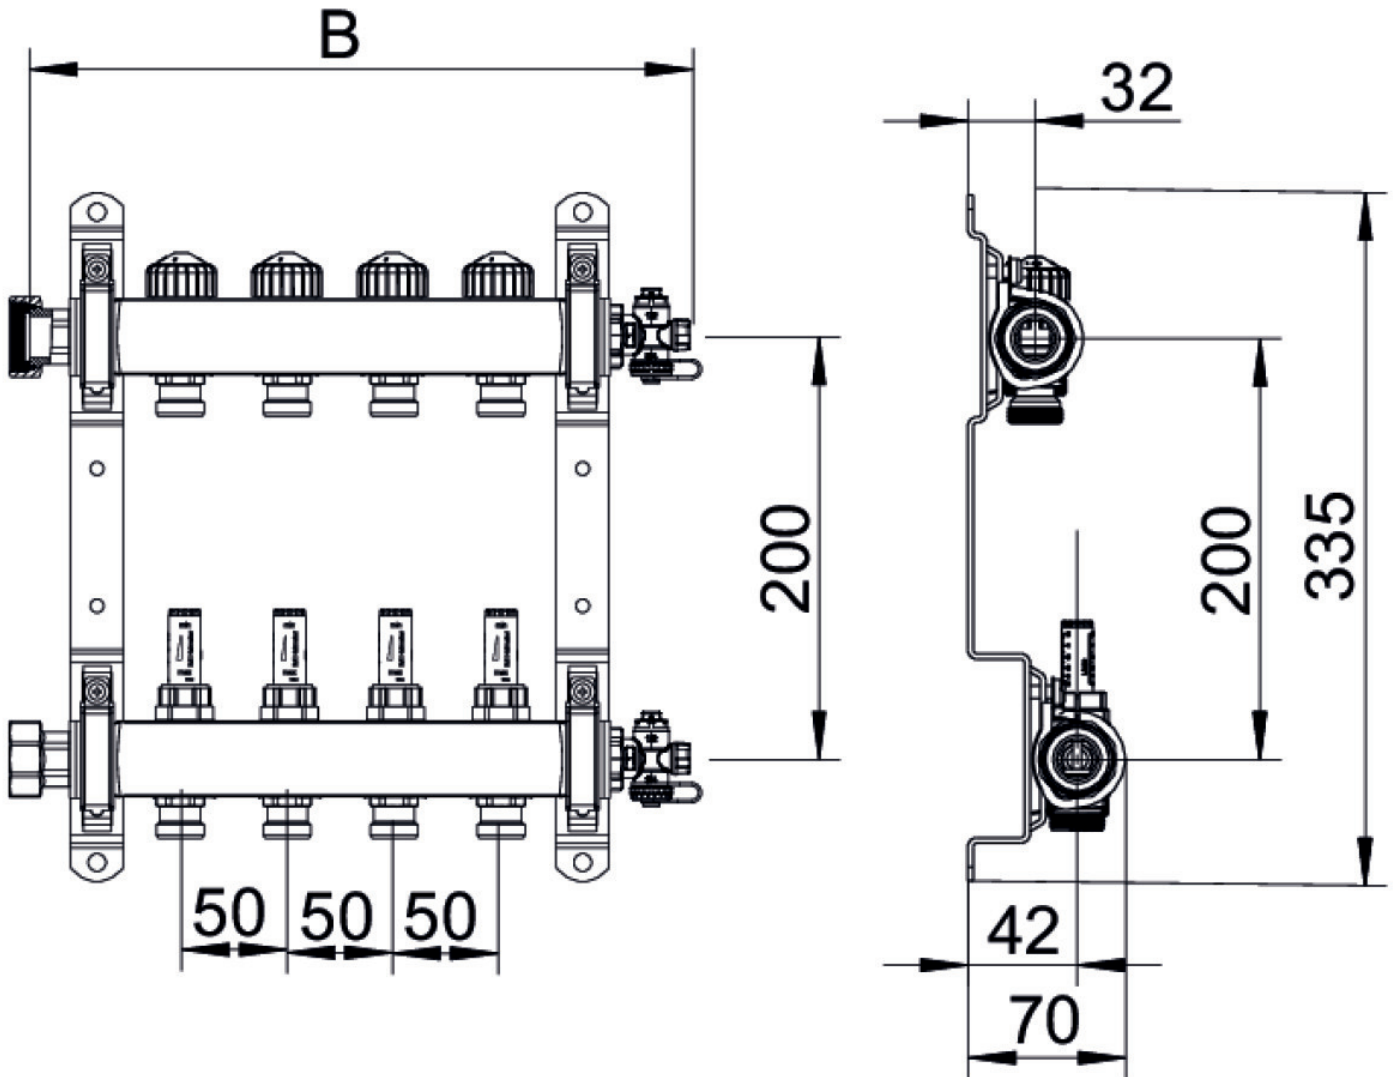

Art. No	label	t	t	h
7902600	2 L: 225mm	80	225	305



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com