


# KELOX<sub>FB</sub>

?KELOX-ULTRAX FB manifold 5 L: 375mm

7905600

## Areas of application

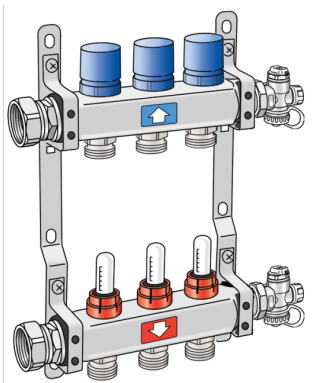

?Stainless steel flow and return flow bar with 3/4" male Euro cone heating circuit outlets, with bleeding and emptying at the manifold end, connections with screwed-in 1" flat-sealing cap nut. Return flow valve bonnet for KM596 KELOX thermal motor, feed flow water flow meter adjustable to 0.5-5.0 l/min, including soundproofed steel consoles  
Application area: tmax. 70°C/6 bar


ATTENTION – WITHOUT KM220 Euro screw connection!

# Specifications

## Product information

text

?KELOX-ULTRAX FB manifold

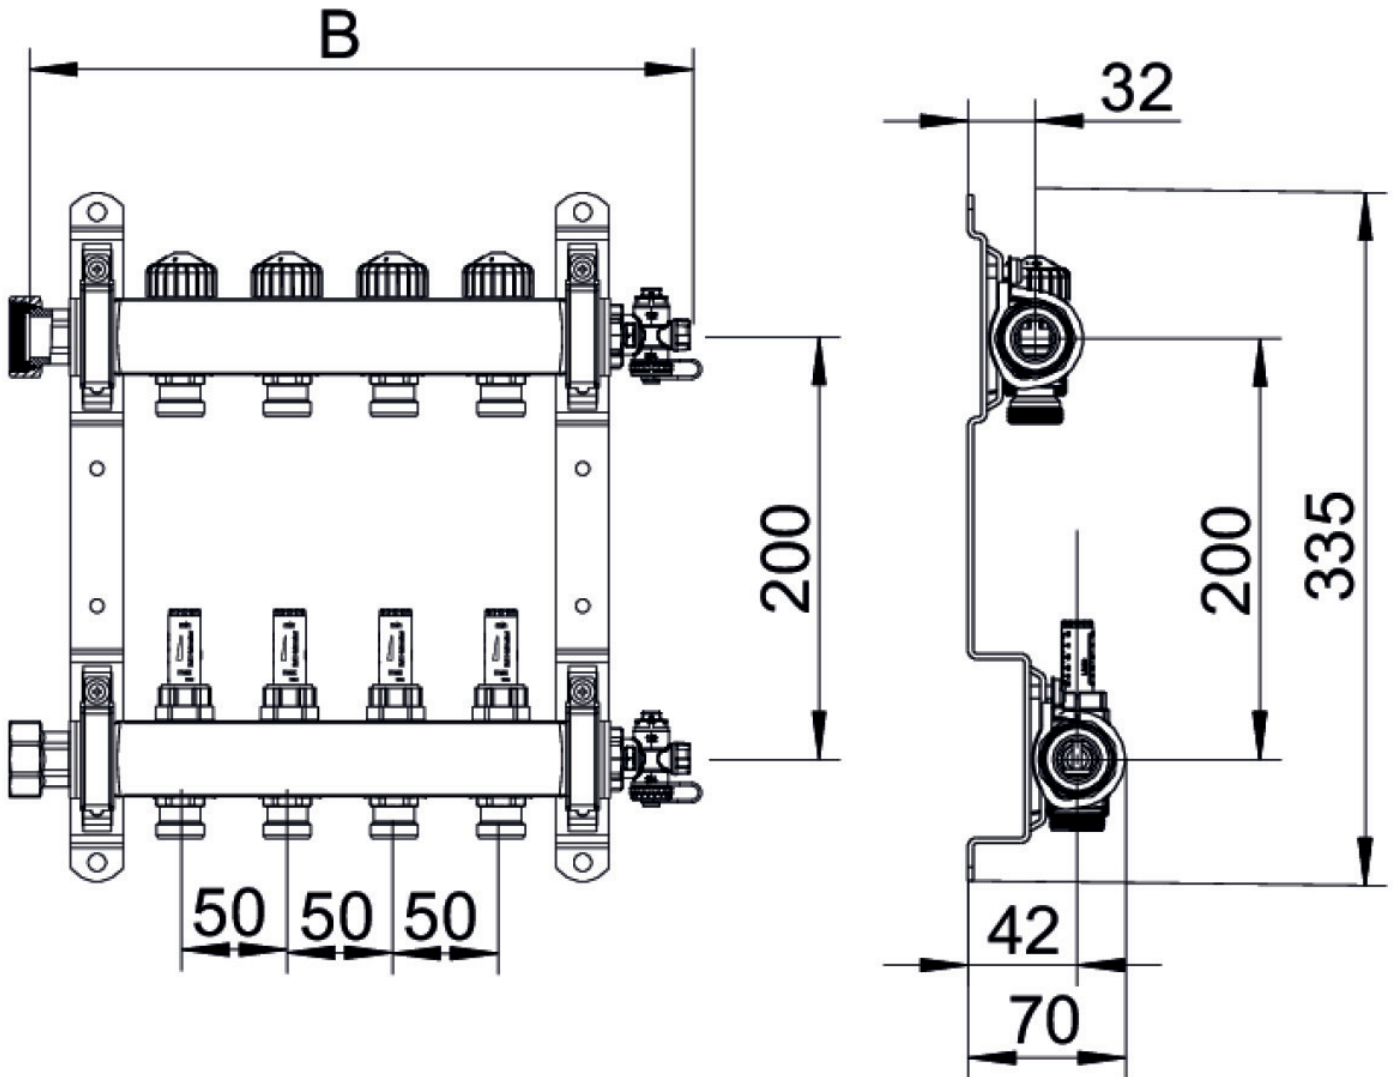

Art. No	label	t	t	h
7905600	5 L: 375mm	80	375	305



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)