

# KELOX<sub>FB</sub>

## KELOX-PROTEC FB stainless steel push fitting manifold 2 L: 225mm

73171020

### Areas of application



?Stainless steel flow and return flow bar with pluggable heating circuit outlets, with bleeding and emptying at the manifold end, connections with screwed-in 1" flat-sealing cap nut. Return flow valve bonnet for KM596 KELOX thermal motor, feed flow water flow meter adjustable to 0.5-5.0 l/min, including small soundproofed steel consoles

Application area: tmax. 70°C/6 bar


ATTENTION – WITHOUT KMP552 PROTEC quick-push coupling!

# Specifications

## Product information

text

KELOX-PROTEC FB stainless steel push fitting manifold

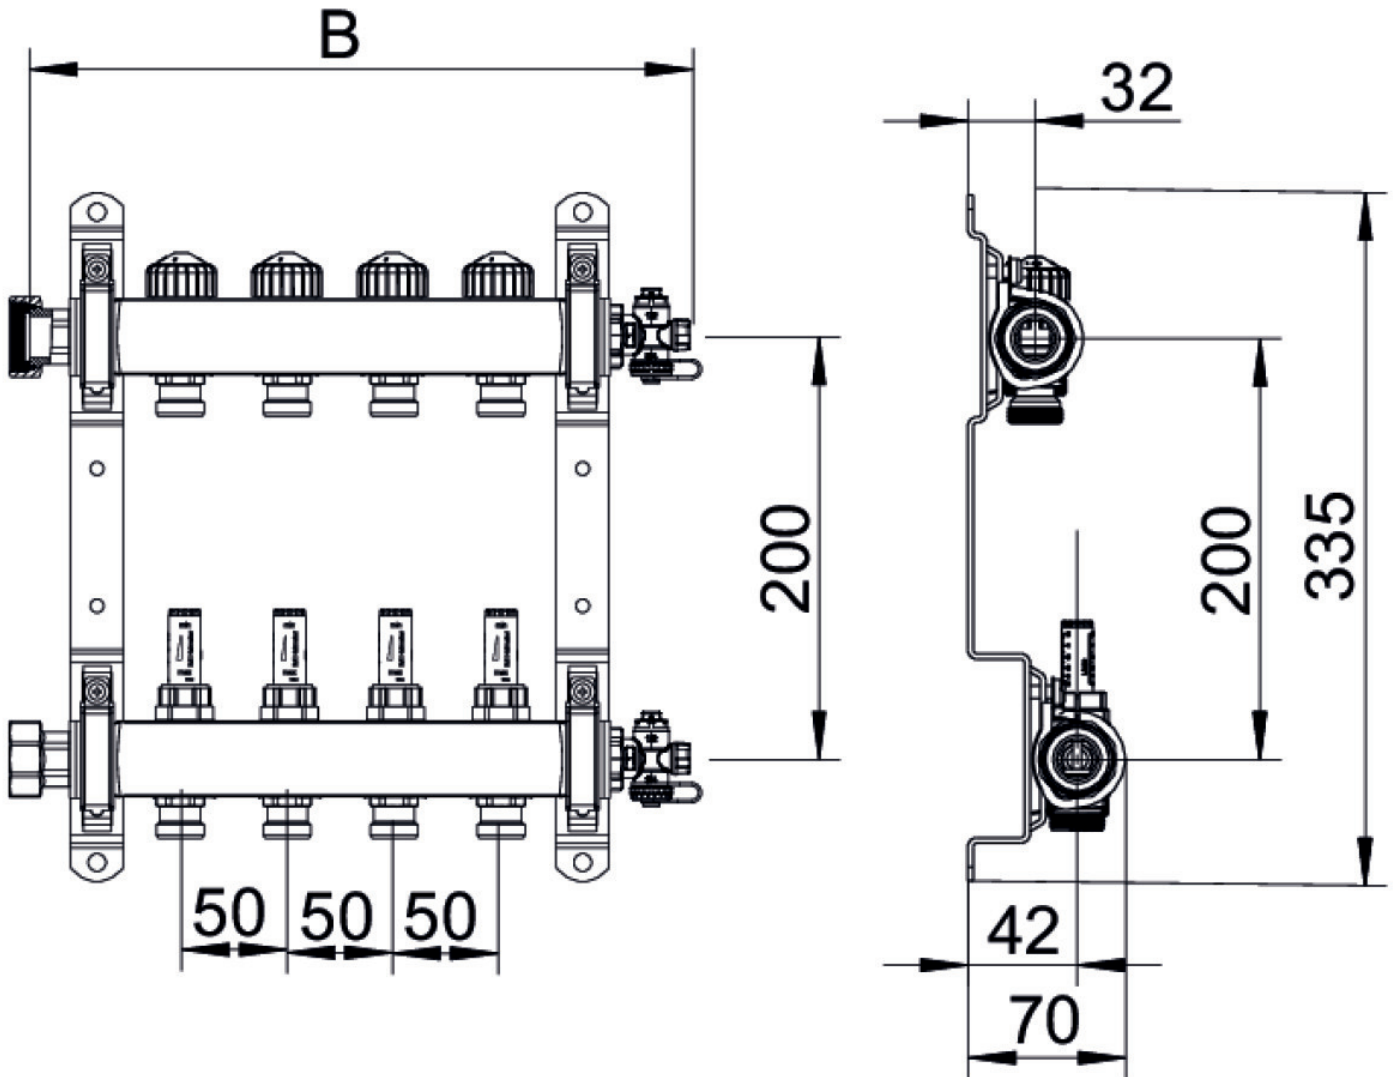

Art. No	label	t	t	h
73171020	2 L: 225mm	80	225	305



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)