

KELOX_{FB}

KMP590E KELOX-PROTEC FB stainless steel push fitting manifold 5 L: 375mm

73171050

Areas of application



?Stainless steel flow and return flow bar with pluggable heating circuit outlets, with bleeding and emptying at the manifold end, connections with screwed-in 1" flat-sealing cap nut. Return flow valve bonnet for KM596 KELOX thermal motor, feed flow water flow meter adjustable to 0.5-5.0 l/min, including small soundproofed steel consoles


Application area: tmax. 70°C/6 bar

ATTENTION – WITHOUT KMP552 PROTEC quick-push coupling!

Specifications

Product information

| | |
|----------------------------|---|
| text | KELOX-PROTEC FB stainless steel push fitting manifold |
| main material group | KELOX |
| material group | KELOX FB-accessories |
| code | KMP590E |

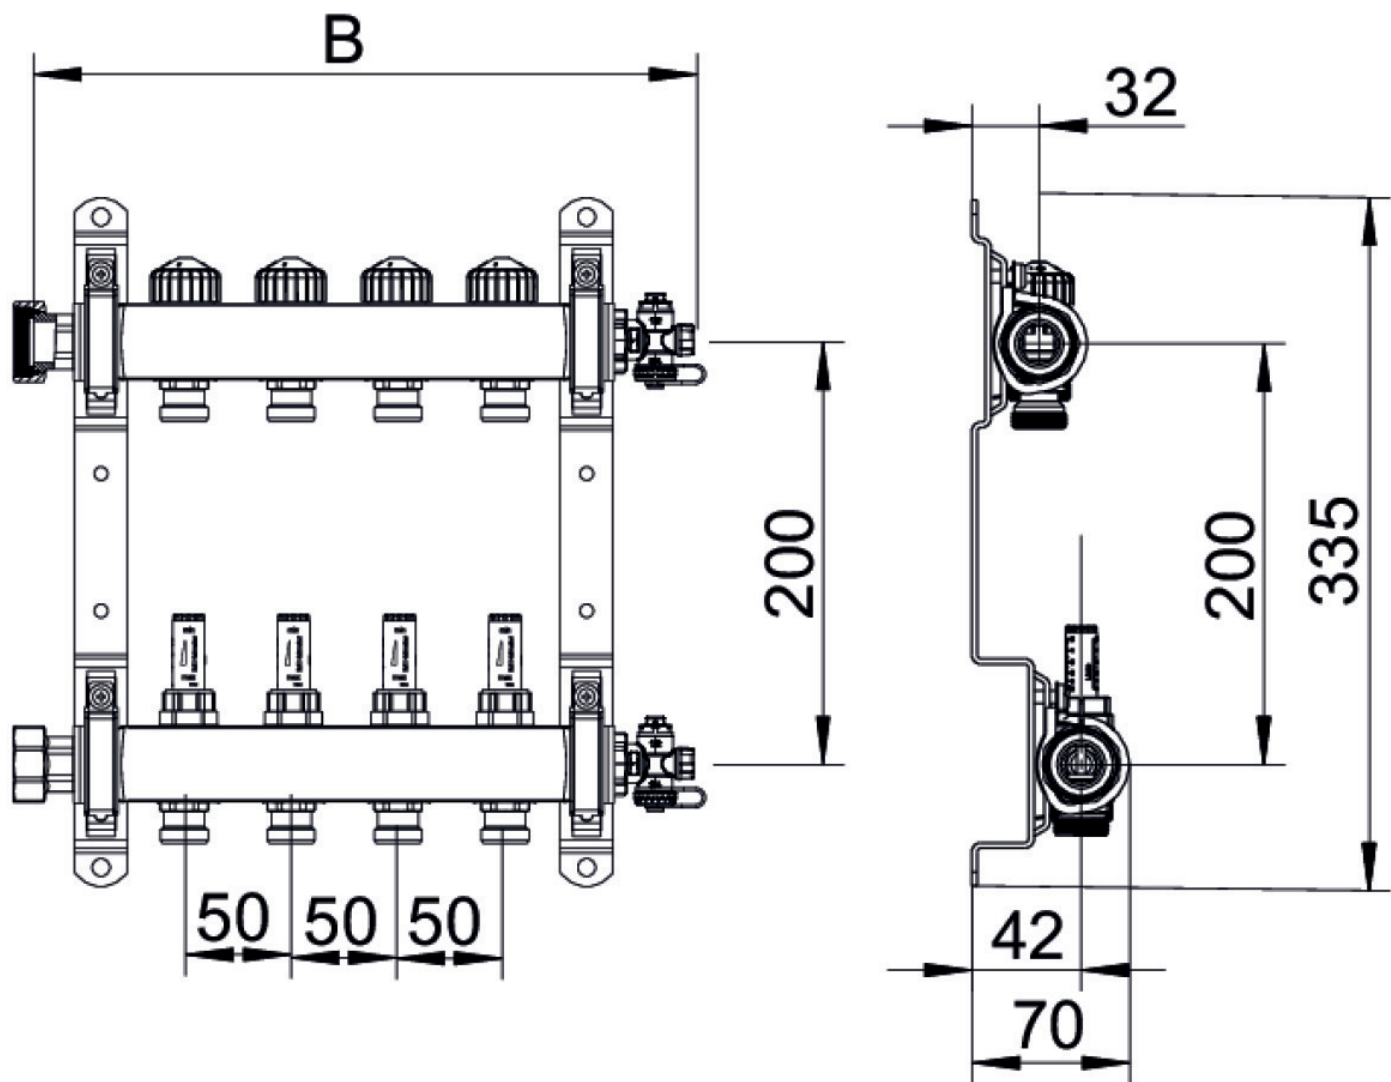

| Art. No | label | t | t | h |
|----------|------------|----|-----|-----|
| 73171050 | 5 L: 375mm | 80 | 375 | 305 |