


# KELOX<sub>FB</sub>

KMP590E KELOX-PROTEC FB stainless steel push fitting manifold 7 L: 475mm

73171070

## Areas of application

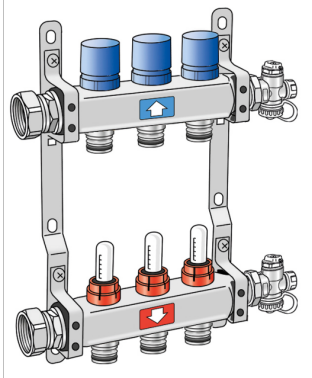

?Stainless steel flow and return flow bar with pluggable heating circuit outlets, with bleeding and emptying at the manifold end, connections with screwed-in 1" flat-sealing cap nut. Return flow valve bonnet for KM596 KELOX thermal motor, feed flow water flow meter adjustable to 0.5-5.0 l/min, including small soundproofed steel consoles


Application area: tmax. 70°C/6 bar

ATTENTION – WITHOUT KMP552 PROTEC quick-push coupling!

# Specifications

## Product information

|                            |   |
|----------------------------|---|
| <b>text</b>                | KELOX-PROTEC FB stainless steel push fitting manifold |
| <b>main material group</b> | KELOX   |
| <b>material group</b>      | KELOX FB-accessories                                  |
| <b>code</b>                | KMP590E   |

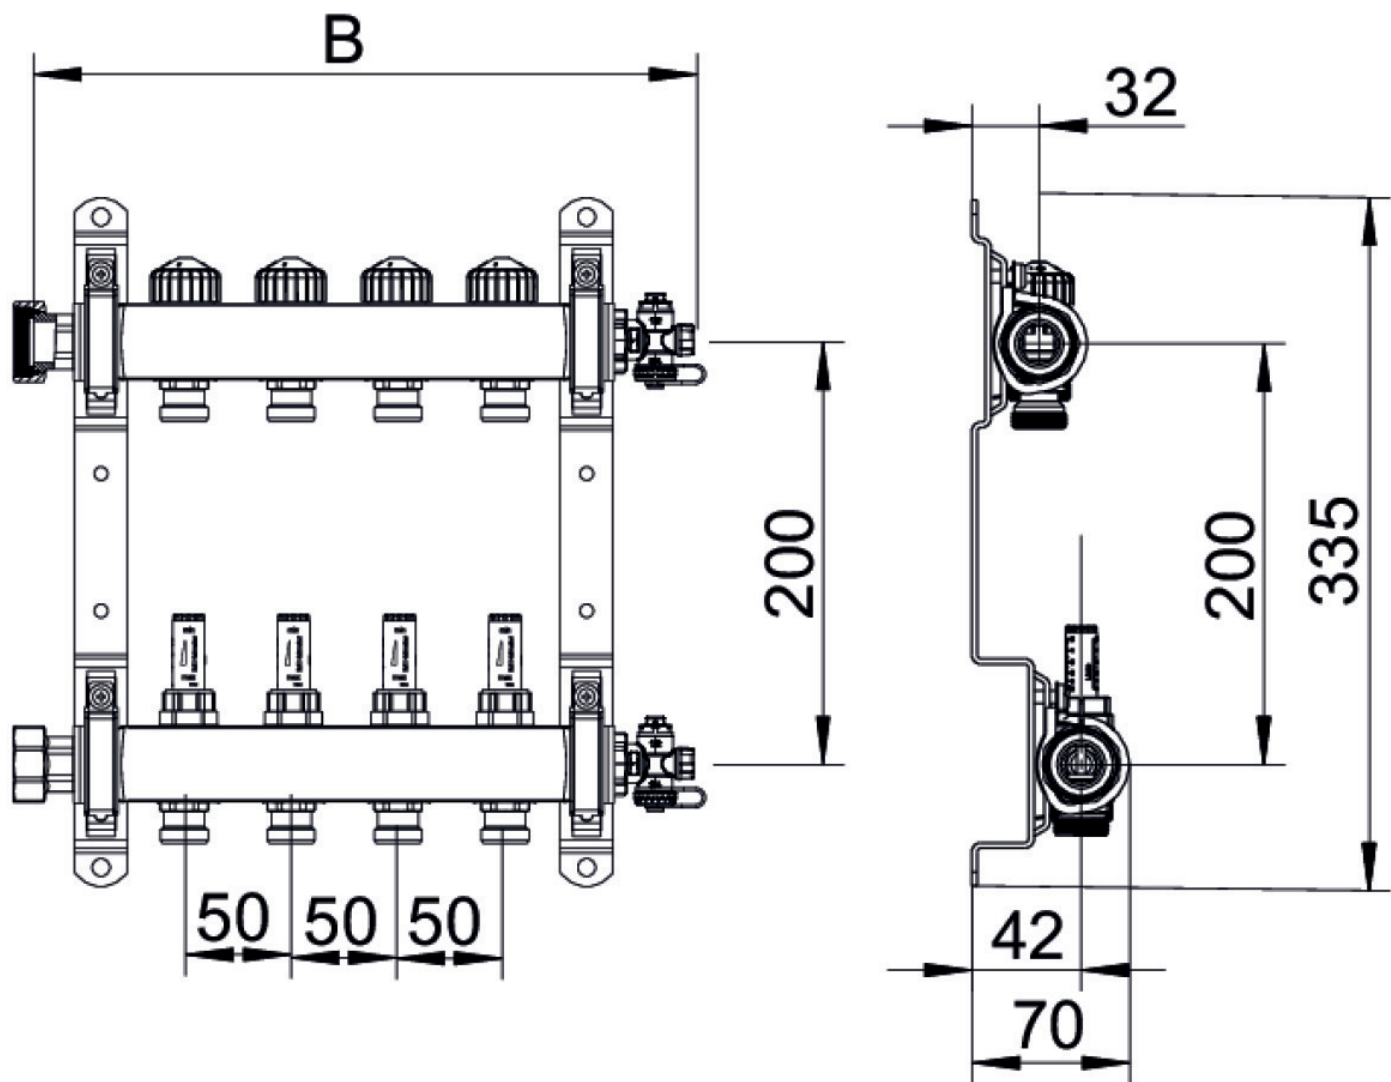

| Art. No  | label      | t  | t   | h   |
|----------|------------|----|-----|-----|
| 73171070 | 7 L: 475mm | 80 | 475 | 305 |