


KELOX_{FB}

KMP590E KELOX-PROTEC FB stainless steel push fitting manifold 10 L: 625mm

73171100

Areas of application

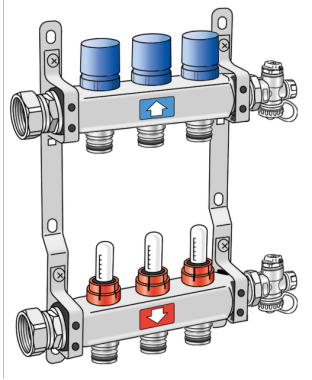

?Stainless steel flow and return flow bar with pluggable heating circuit outlets, with bleeding and emptying at the manifold end, connections with screwed-in 1" flat-sealing cap nut. Return flow valve bonnet for KM596 KELOX thermal motor, feed flow water flow meter adjustable to 0.5-5.0 l/min, including small soundproofed steel consoles


Application area: tmax. 70°C/6 bar

ATTENTION – WITHOUT KMP552 PROTEC quick-push coupling!

Specifications

Product information

text	KELOX-PROTEC FB stainless steel push fitting manifold
main material group	KELOX
material group	KELOX FB-accessories
code	KMP590E

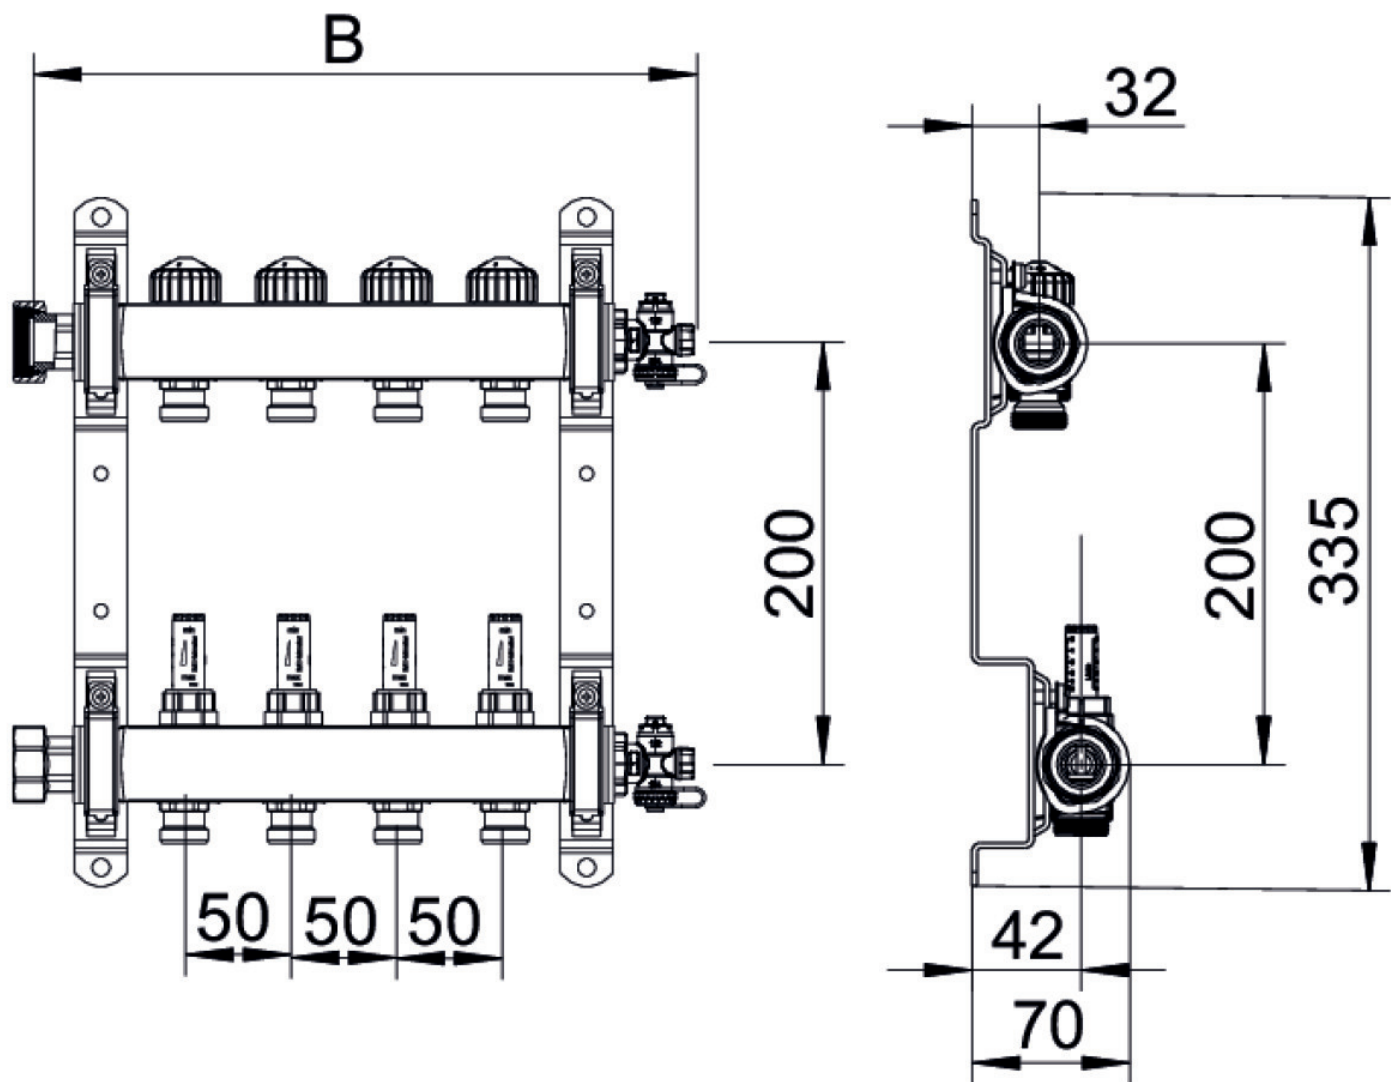

Art. No	label	t	t	h
73171100	10 L: 625mm	80	625	305