

KELOX_{FB}

KELOX-PROTEC FB stainless steel push fitting manifold 13 L: 775mm

73171130

Areas of application



?Stainless steel flow and return flow bar with pluggable heating circuit outlets, with bleeding and emptying at the manifold end, connections with screwed-in 1" flat-sealing cap nut. Return flow valve bonnets for KM596 KELOX thermal motor, feed flow water flow meter adjustable to 0.5-5.0 l/min, including small soundproofed steel consoles

Application area: tmax. 70°C/6 bar


ATTENTION – WITHOUT KMP552 PROTEC quick-push coupling!

Specifications

Product information

text

KELOX-PROTEC FB stainless steel push fitting manifold

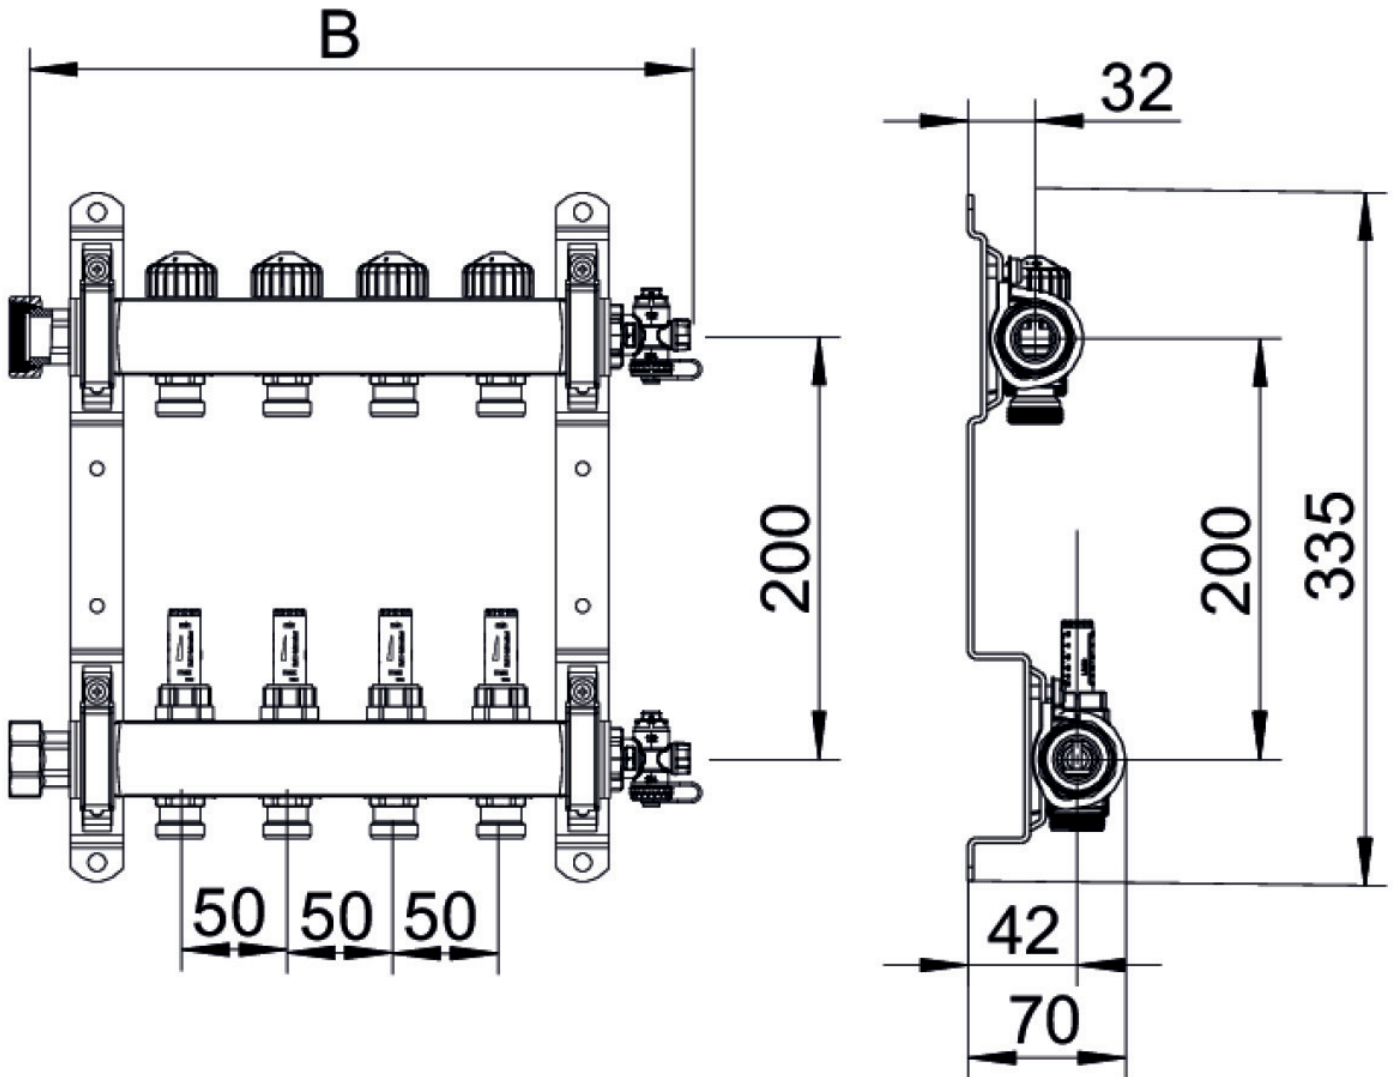

Art. No	label
73171130	13 L: 775mm



KE KELIT GmbH
A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe
PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com
www.kekelit.com