


KELOX

KMP460X KELOX-PROTEC CLIX adapter elbow 90° with male thread 32x1"

730212F05

Areas of application

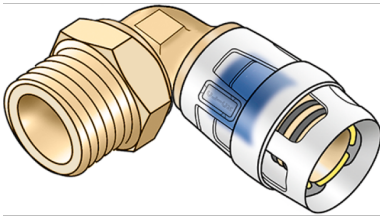

Plug-in adapter elbow with male thread, made of dezincification-resistant (DZR) brass, incl. push-on sleeve made of transparent polyamide with insertion click noise, as well as haptic and optical insertion indicator, O-rings, withdrawal barriers and protector ring as an insertion locking device

Approvals:



Specifications

Article information

| | |
|--------|---|
| port 1 | Plug-in |
| port 2 | Male thread conical (NPT) conical (NPT) |
| design | Knee |
| angle | 90 ° |

Technical properties

| | |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 10 bar |
|------------------------------------|--------|

Product information

| | |
|---------------------|--|
| VPE1 | 6,00 SA1 |
| VPE2 | 48,00 KT1 |
| weight | 0,018 KGM |
| text | KELOX-PROTEC CLIX adapter elbow 90° with male thread |
| INTRNR | 74122000 |
| main material group | KELOX |
| material group | KELOX-PROtec pushfittings |
| code | KMP460X |



| Art. No | label | d2 Zoll | d1 mm | L1 mm | z1 mm | z2 mm | slw1 mm |
|-----------|-------|-------------|-------|-------|-------|-------|---------|
| 730212F05 | 32x1" | 1 Zoll (25) | 32 | 63 | 24 | 51 | 34 |