


KELOX_{FB}

KM695B KELOX 230V wireless receiver
290x52x75mm RAL7035

5881365

Areas of application

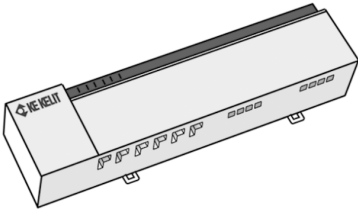

For connecting a maximum of 8 room thermostats, possible to connect up to 12 (230 V) thermal motors, potential-free contact for a changeover signal, as well as pump logic for switching a 230 V/200 W circulation pump, up to 7 KM695B or KM695S can be connected via wireless and/or syBUS.

Integration into a network by means of an RJ45 Ethernet port is possible, operation by means of a Web interface or smartphone app (a network connection is necessary) or via a KM694K room unit. Integration by means of an XML interface into a centralised instrumentation and control system; maximum distance from wireless room thermostat 3 walls and 1 storey ceiling

Connection voltage: 230V AC 50 Hz

Wireless frequency: 868 MHz

Size: 290x52x75mm

Colour: light grey (RAL 7035)

ATTENTION: Take into account space requirement in manifold cabinet!

Only in conjunction with KM694 or KM694K wireless room thermostats!

Only in conjunction with KM596 KELOX 230V thermal motor!



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

Specifications

Product information	
VPE1	1,00 KT1
VPE2	10,00 KT2
weight	0,830 KGM
text	KELOX 230V wireless receiver
INTRNR	90321020
code	KM695B

Art. No	label
5881365	290x52x75mm RAL7035