


# KELOX

## KM100 ?KELOX multilayer pipe 25x2.5/50

7411250E

### Areas of application

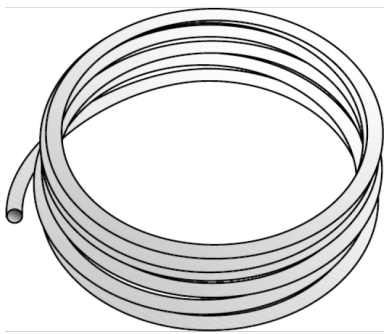

?KELOX multilayer pipe conforming to ÖNORM EN ISO 21003, oxygen-and water vapour diffusion-tight 5-layer PE-RT/Al/PE-RT composite pipe

Operating conditions classified acc. to ÖNORM EN ISO 21003

Sanitary application - Class 2: 70°C - tmax 80°C/10 bar

Radiator connection - Class 5: 80°C - tmax 90°C/10 bar

Colour: white/transparent

Supplied in coils

## Approvals:



# Specifications

## Article information

**color** White

**flexible** 1

## Technical properties

**maximum working pressure at 20 ° C** 10 bar

**pipe weight** 0,22 kg/m

**pipe contents** 0,314 l/m

**lambda pipe** 0,45 W/(m.K)

**wall rawness** 0.007 mm

**expansion coefficient** 0.025 mm/(m.K)

## Product information

**VPE1** 50,00 ROL

**VPE2** 500,00 PAL

**L** 50 m

**weight** 0,232 KGM

**text** ?KELOX multilayer pipe

**INTRNR** 39173900

**main material group** KELOX

**material group** KELOX pipes

**code** KM100



Art. No	label	d1 mm	pipe contents l/m	s mm
7411250E	25x2.5/50	25	0,314	2,5



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)