


# KELOX

## KM100 KELOX multilayer pipe 25x2,5/Sonderlänge

74112502

### Areas of application

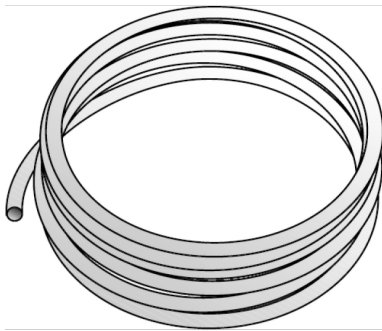

KELOX multilayer pipe conforming to ÖNORM EN ISO 21003; oxygen- and water vapour-tight 5-layer multilayer pipe made of PE-RT/Al/ PE-RT;

Operating conditions according to classification of ÖNORM EN ISO 21003

Sanitary application - Class 2: 70°C - tmax 80°C/10 bar

Radiator connection - Class 5: 80°C - tmax 90°C/10 bar

Colour: white/transparent

Supplied in coils

## Approvals:



# Specifications

## Article information

**color** weiß

**flexible** 1

## Technical properties

**maximum working pressure at 20 ° C** 10 bar

**pipe weight** 0,22 kg/m

**pipe contents** 0,314 l/m

**lambda pipe** 0,45 W/(m.K)

**wall rawness** 0,007 mm

**expansion coefficient** 0,025 mm/(m.K)

## Product information

**weight** 0,220 KGM

**text** KELOX multilayer pipe

**INTRNR** 39173900

**main material group** KELOX

**material group** KELOX pipes

**code** KM100



| Art. No  | label              | d1 mm | pipe contents l/m | s mm |
|----------|--------------------|-------|-------------------|------|
| 74112502 | 25x2,5/Sonderlänge | 25    | 0,314             | 2,5  |



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com