


# KELOX

## KMU100 ?KELOX-ULTRAX multilayer pipe 12x1.5

7021203

### Areas of application

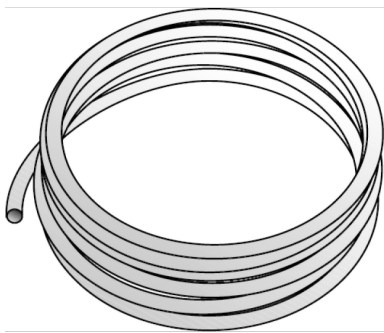

?KELOX-ULTRAX multilayer pipe for CLIMATEFIX based on ÖNORM EN ISO 21003, oxygen and water vapour diffusion-tight 5-layer PE-RT/Al/PE-RT composite pipe PE-RT/Al/PE-RT

Area of application: 60°C - tmax 70°C/10 bar

Colour: white/transparent

Supplied in coils

ATTENTION: This is NOT a drinking water and radiator connection pipe!

## Approvals:



# Specifications

## Article information

**color** White

**flexible** 1

**isolation** 0

## Technical properties

**maximum working pressure at 20 ° C** 10 bar

**pipe weight** 0.09 kg/m

**pipe contents** 0.064 l/m

**lambda pipe** 0,45 W/(m.K)

**wall rawness** 0.007 mm

**expansion coefficient** 0.025 mm/(m.K)

## Product information

**VPE1** 300,00 ROL

**L** 300 m

**weight** 0,060 KGM

**text** ?KELOX-ULTRAX multilayer pipe

**INTRNR** 39173900

**main material group** KELOX

**material group** KELOX-ULTRAX pipes

**code** KMU100



Art. No	label	d1 mm	pipe contents l/m	s mm
7021203	12x1.5	12	0.064	1,5



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)