


# KELOX

## KMU100 KELOX-ULTRAX multilayer pipe 16x2

7021606

### Areas of application

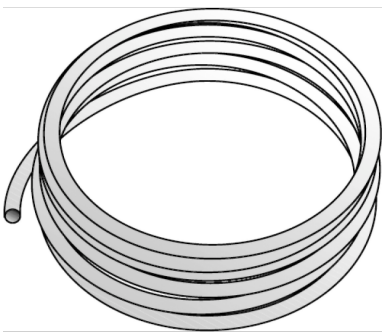

?KELOX-ULTRAX multilayer pipe for CLIMATEFIX based on ÖNORM EN ISO 21003, an oxygen- and water vapour diffusion-tight 5-layer PE-RT/Al/PE-RT composite pipe

Application range: 60°C - tmax 70°C/10 bar

Colour: white/transparent

Supplied in coils

ATTENTION - This is NOT a drinking water and radiator connection pipe!

## Approvals:



# Specifications

## Article information

**color** White

**flexible** 1

**isolation** 0

## Technical properties

**maximum working pressure at 20 ° C** 10 bar

**pipe weight** 0,11 kg/m

**pipe contents** 0,113 l/m

**lambda pipe** 0,45 W/(m.K)

**wall rawness** 0,007 mm

**expansion coefficient** 0,025 mm/(m.K)

## Product information

**VPE1** 600,00 ROL

**VPE2** 3600,00 PAL

**L** 600 m

**weight** 0,108 KGM

**text** KELOX-ULTRAX multilayer pipe

**INTRNR** 39173900

**main material group** KELOX

**material group** KELOX-ULTRAX pipes

**code** KMU100



Art. No	label	d1 mm	pipe contents l/m	s mm
7021606	16x2	16	0,113	2



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)