


KELOX

KMU100 ?KELOX-ULTRAX multilayer pipe 16x2

7021607

Areas of application

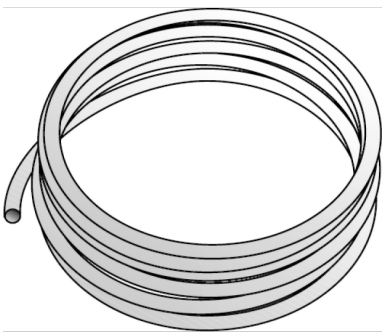

?KELOX-ULTRAX multilayer pipe for CLIMATEFIX based on ÖNORM EN ISO 21003, oxygen and water vapour diffusion-tight 5-layer PE-RT/Al/PE-RT composite pipe PE-RT/Al/PE-RT

Area of application: 60°C - tmax 70°C/10 bar

Colour: white/transparent

Supplied in coils

ATTENTION: This is NOT a drinking water and radiator connection pipe!

Approvals:



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

Specifications

Article information

color White

flexible 1

isolation 0

Technical properties

maximum working pressure at 20 ° C 10 bar

pipe weight 0.11 kg/m

pipe contents 0.113 l/m

lambda pipe 0,45 W/(m.K)

wall rawness 0.007 mm

expansion coefficient 0.025 mm/(m.K)

Product information

VPE1 700,00 ROL

VPE2 4200,00 PAL

L 700 m

weight 0,110 KGM

text ?KELOX-ULTRAX multilayer pipe

INTRNR 39173900

main material group KELOX

material group KELOX-ULTRAX pipes

code KMU100



Art. No	label	d1 mm	pipe contents l/m	s mm
7021607	16x2	16	0.113	2



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com