


KELOX

KUC100 KELOX-ECO pipe 25x2.5

70325205

Areas of application

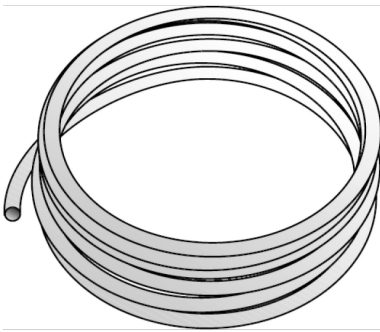

?KELOX-ECO solid-wall pipe as per ÖNORM EN ISO 22391 made from PE-RT Type 2.

Classification of operating conditions according to ÖNORM EN ISO 22391

Cold water area of application: 20 °C - 10 bar

Warm water application range: 60°C - 6 bar

Colour: white

Supplied in coils

Approvals:



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

Specifications

Article information

color	weiß
flexible	1
trade length	50 m
isolation	0

Technical properties

maximum working pressure at 20 ° C	10 bar
pipe contents	0,314 l/m
wall rawness	0.007 mm

Product information

VPE1	50,00 ROL
VPE2	700,00 PAL
L	50
weight	0,174 KGM
text	KELOX-ECO pipe
INTRNR	39173900
main material group	KELOX
material group	KELOX pipes
code	KUC100



Art. No	label	d1 mm	pipe contents l/m	s mm
70325205	25x2.5	25	0,314	2,5



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com