


KELOX_{FB}

KMP590D KELOX-PROTEC FB regulating push fitting manifold 4 L: 325mm

73172040

Areas of application

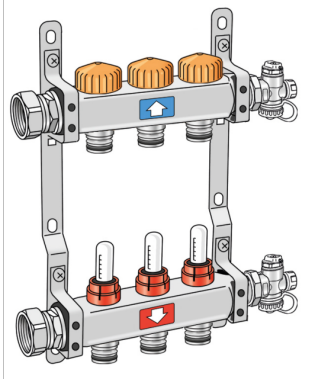

?Stainless steel flow and return flow bar with pluggable heating circuit outlets, with bleeding and emptying at the manifold end, connections with screwed-in 1" flat-sealing cap nut. Automatic flow control and hydraulic balancing of the individual return flow valves, suitable for KM596 KELOX thermal motor, feed flow water flow meter adjustable to 0.5-5.0 l/min, including soundproofed steel consoles

Application area: tmax. 70°C/6 bar

ATTENTION: WITHOUT KMP552 PROTEC quick-push coupling!

Specifications

Product information

| | |
|---------------|--|
| VPE1 | 1,00 KT1 |
| VPE2 | 119,00 PAL |
| weight | 2,850 KGM |
| text | KELOX-PROTEC FB regulating push fitting manifold |
| INTRNR | 84818099 |
| code | KMP590D |



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com



| Art. No | label | t mm | t mm | h mm |
|----------|------------|------|------|------|
| 73172040 | 4 L: 325mm | 70 | 375 | 336 |