


# TRI2002 KETRIX PE pipe - PN10 50x4.6

3019050

## Areas of application

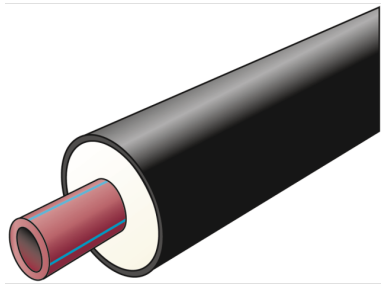

Pre-insulated industrial piping system based on ÖNORM EN ISO 15874

Medium pipe: d40-160 = TRI02, adhesion-pretreated

Application area: 20°C/10 bar - from -30°C to +30°C/8 bar

Insulation: PUR rigid foam

Jacket pipe: PE-HD

Length: 6m

# Specifications

| Product information        |                                 |
|----------------------------|---------------------------------|
| <b>casing DA</b>           | 110                             |
| <b>VPE1</b>                | 6,00 STG                        |
| <b>L</b>                   | 6 m                             |
| <b>weight</b>              | 2,180 KGM                       |
| <b>text</b>                | KETRIX PE pipe - PN10           |
| <b>INTRNR</b>              | 39172290                        |
| <b>main material group</b> | KETRIX CX/PE                    |
| <b>material group</b>      | KETRIX CX/PE pipes and fittings |
| <b>code</b>                | TRI2002                         |

| Art. No | label  |
|---------|--------|
| 3019050 | 50x4.6 |