


# TRI1008 KETRIX-CX pipe - PN16 20x2.3

3019210

## Areas of application

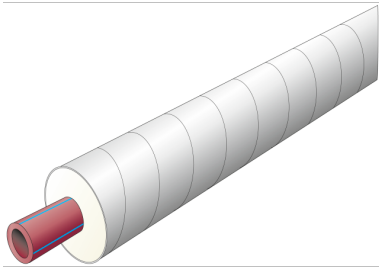

Pre-insulated industrial pipe system based on ÖNORM EN ISO 15874

Medium pipe: d20-110 = TRI08, adhesion-pretreated

Application area: 20°C/16 bar - from -30°C to +40°C/10 bar

Insulation: PUR rigid foam

Jacket pipe: 0.6 mm galvanised folded spiral sheet metal

Length: 6m

# Specifications

## Product information

<b>casing DA</b>	80
<b>VPE1</b>	6,00 STG
<b>L</b>	6 m
<b>weight</b>	1,910 KGM
<b>text</b>	KETRIX-CX pipe - PN16
<b>INTRNR</b>	39172290
<b>main material group</b>	KETRIX CX/PE
<b>material group</b>	KETRIX CX/PE pipes and fittings
<b>code</b>	TRI1008

<b>Art. No</b>	<b>label</b>
3019210	20x2.3