


TRI1008 KETRIX-CX pipe - PN16 110x15.1

3019390

Areas of application

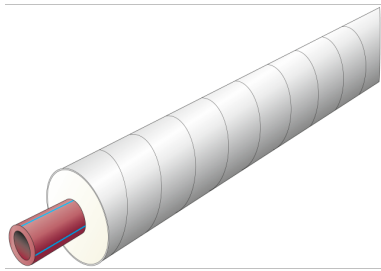

Pre-insulated industrial pipe system based on ÖNORM EN ISO 15874

Medium pipe: d20-110 = TRI08, adhesion-pretreated

Application area: 20°C/16 bar - from -30°C to +40°C/10 bar

Insulation: PUR rigid foam

Jacket pipe: 0.6 mm galvanised folded spiral sheet metal

Length: 6m

Specifications

| Product information | |
|----------------------------|---------------------------------|
| casing DA | 200 |
| VPE1 | 6,00 STG |
| L | 6 m |
| weight | 9,610 KGM |
| text | KETRIX-CX pipe - PN16 |
| INTRNR | 39172290 |
| main material group | KETRIX CX/PE |
| material group | KETRIX CX/PE pipes and fittings |
| code | TRI1008 |

| Art. No | label |
|---------|----------|
| 3019390 | 110x15.1 |