


KELOX

KMP477 KELOX-PROTEC double U wall bracket fitting female 16x1/2"

73254B2B

Areas of application

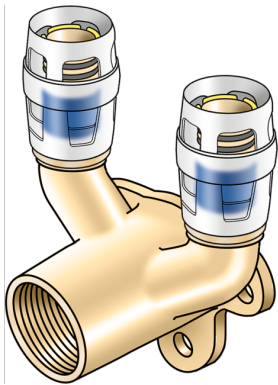

Double U wall bracket fitting with female thread, made of dezincification-resistant brass (DZR), incl. push-on sleeve made of transparent polyamide, O-rings, withdrawal barriers and a protector ring as an insertion locking device

Overall height:

1/2" - 46 mm

DO NOT screw in threaded pipes and cast iron fittings!

Approvals:



Specifications

Article information


port 1	Plug-in
port 2	Plug-in
port 3	Female thread metric
execution	Miscellaneous
design	Continuously right-angled

Technical properties

maximum working pressure at 20 ° C	10 bar
------------------------------------	--------

Product information

VPE1	10,00 SA1
VPE2	50,00 KT1
weight	0,254 KGM
text	KELOX-PROTEC double U wall bracket fitting female
INTRNR	74122000
main material group	KELOX
material group	KELOX-PROtec pushfittings
code	KMP477

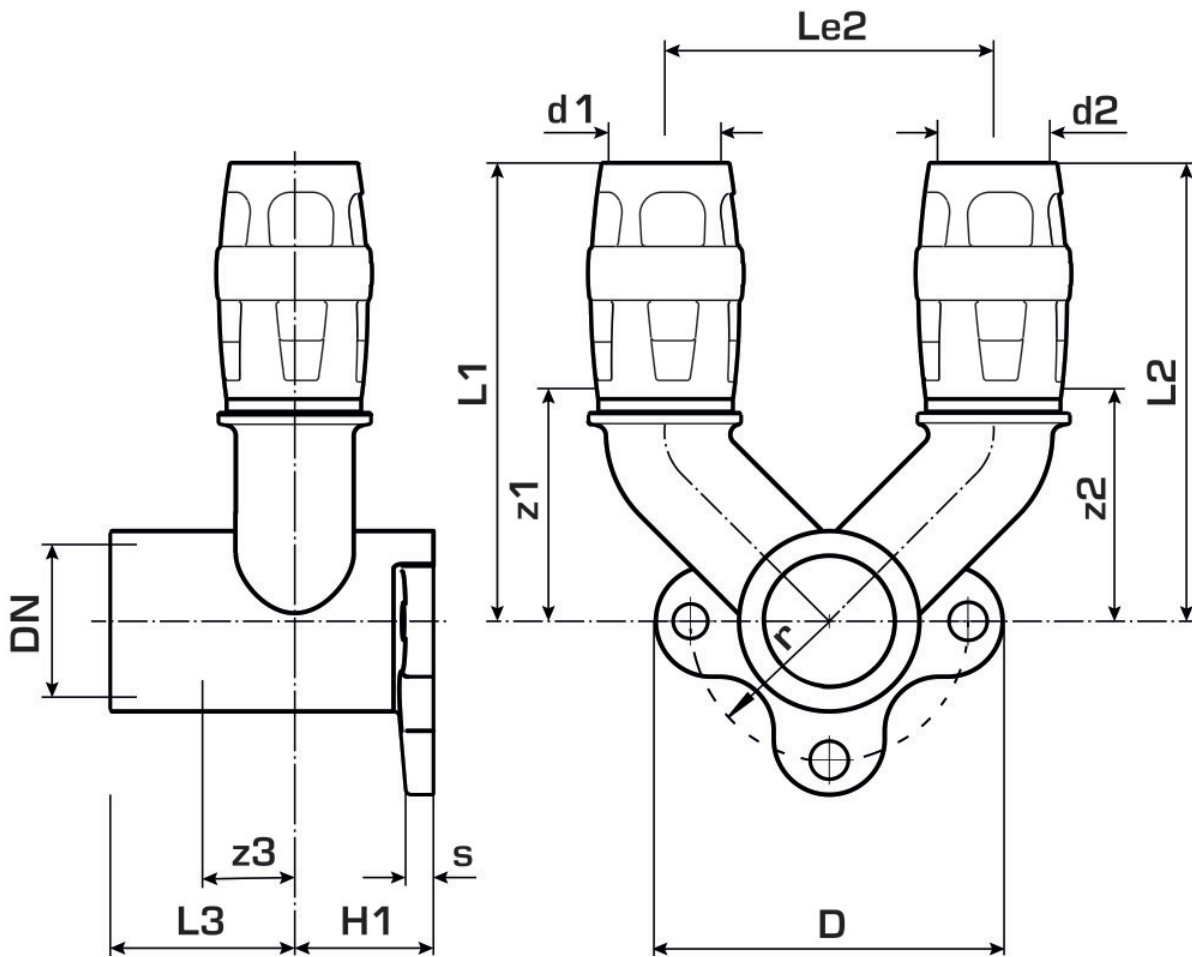

Art. No	label	d3	d1 mm	d2 mm	d3	d1 mm	L1 mm	L2 mm	L3 mm	z1	z2	z3	z1 mm	z2 mm	z3 mm
73254	16x1/2	1/2" (15)	16	16	26.5	16	66	26	27	31.5	31.5	9	34	9	8,5