


# STEEL FIX C-STAHL

CP415 C-Steel press-repair coupling 88,9

54605KK0

## Areas of application

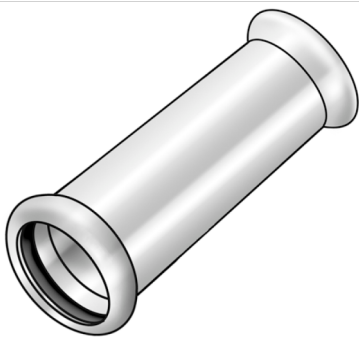

Press-fit repair coupling straight made of carbon steel coated with a zinc layer, incl. EPDM sealing components, d15-54 "leak before pressed"

Press contour: M

# Specifications

## Article information

|               |            |
|---------------|------------|
| port 1        | Pressmuffe |
| port 2        | Pressmuffe |
| execution     | 1-teilig   |
| design        | gerade     |
| press contour | M          |

## Technical properties

|                                    |        |
|------------------------------------|--------|
| insertion depth 1 (es1)            | 70 mm  |
| maximum working pressure at 20 ° C | 16 bar |

## Product information

|                     |                               |
|---------------------|-------------------------------|
| VPE1                | 2 SA1                         |
| weight              | 1,32 KGM                      |
| text                | C-Steel press-repair coupling |
| INTRNR              | 73079980                      |
| main material group | STEELFIX                      |
| material group      | C-STAHL pressfittings         |
| code                | CP415                         |



| Art. No  | label | d1 mm | d2 mm | L1 mm | L2 mm | insertion depth 1 (es1) mm | Insertion depth 2 (es2) mm |
|----------|-------|-------|-------|-------|-------|----------------------------|----------------------------|
| 54605KK0 | 88,9  | 88.9  | 88.9  | 131   | 131   | 70                         | 70                         |