


# STEEL FIX C-STAHL

CP440 STEELFIX carbon steel press-fit tee  
35/22/35

54630FDF

## Areas of application

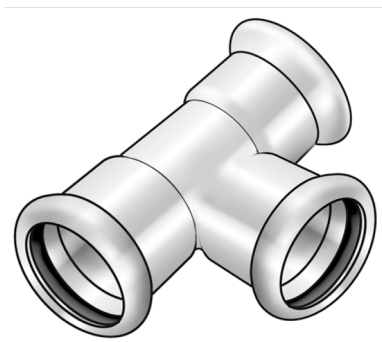

Press-tee equal or reduced made of carbon steel coated with a zinc layer, incl. EPDM sealing components, d15-54 "leak before pressed"

Press contour: M

# Specifications

## Article information

|               |            |
|---------------|------------|
| port 1        | Pressmuffe |
| port 2        | Pressmuffe |
| port 3        | Pressmuffe |
| execution     | T-Stück    |
| press contour | M          |

## Technical properties

|                                    |        |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

## Product information

|                     |                                     |
|---------------------|-------------------------------------|
| VPE1                | 5,00 SA1                            |
| VPE2                | 20,00 KT1                           |
| VPE3                | 500,00 DDP                          |
| weight              | 0,183 KGM                           |
| text                | STEELFIX carbon steel press-fit tee |
| INTRNR              | 73079980                            |
| main material group | STEELFIX                            |
| material group      | C-STAHl pressfittings               |
| code                | CP440                               |



| Art. No  | label    | d1 mm | d2 mm | d3 mm | L1 mm | L2 mm | L3 mm | z1 mm | z2 mm | z3 mm |
|----------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 54630FDF | 35/22/35 | 35    | 22    | 35    | 51    | 55    | 51    | 25    | 34    | 25    |