


# COPPER FIX

COF466 COPPERFIX copper press union female  
35x5/4"

52742F06

## Areas of application

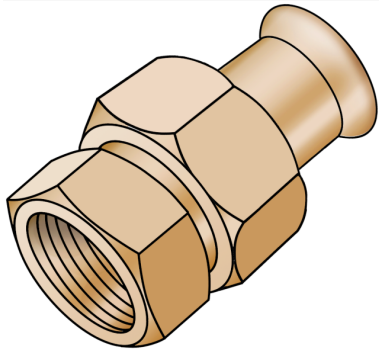

Press-fit union with female thread conforming to EN 10226-1 made of red brass, incl. EPDM sealing components, "leak before pressed"

Press contour: M

## Approvals:



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)


# Specifications

## Article information

<b>port 1</b>	Pressmuffe
<b>port 2</b>	Innengewinde zylindrisch BSPT-Rp (ISO 7-1 / EN 10226-1)
<b>press contour</b>	M

## Product information

<b>VPE1</b>	5,00 SA1
<b>VPE2</b>	25,00 KT1
<b>weight</b>	0,367 KGM
<b>text</b>	COPPERFIX copper press union female
<b>INTRNR</b>	74122000
<b>main material group</b>	COPPERFIX
<b>material group</b>	KUPFER pressfittings
<b>code</b>	COF466

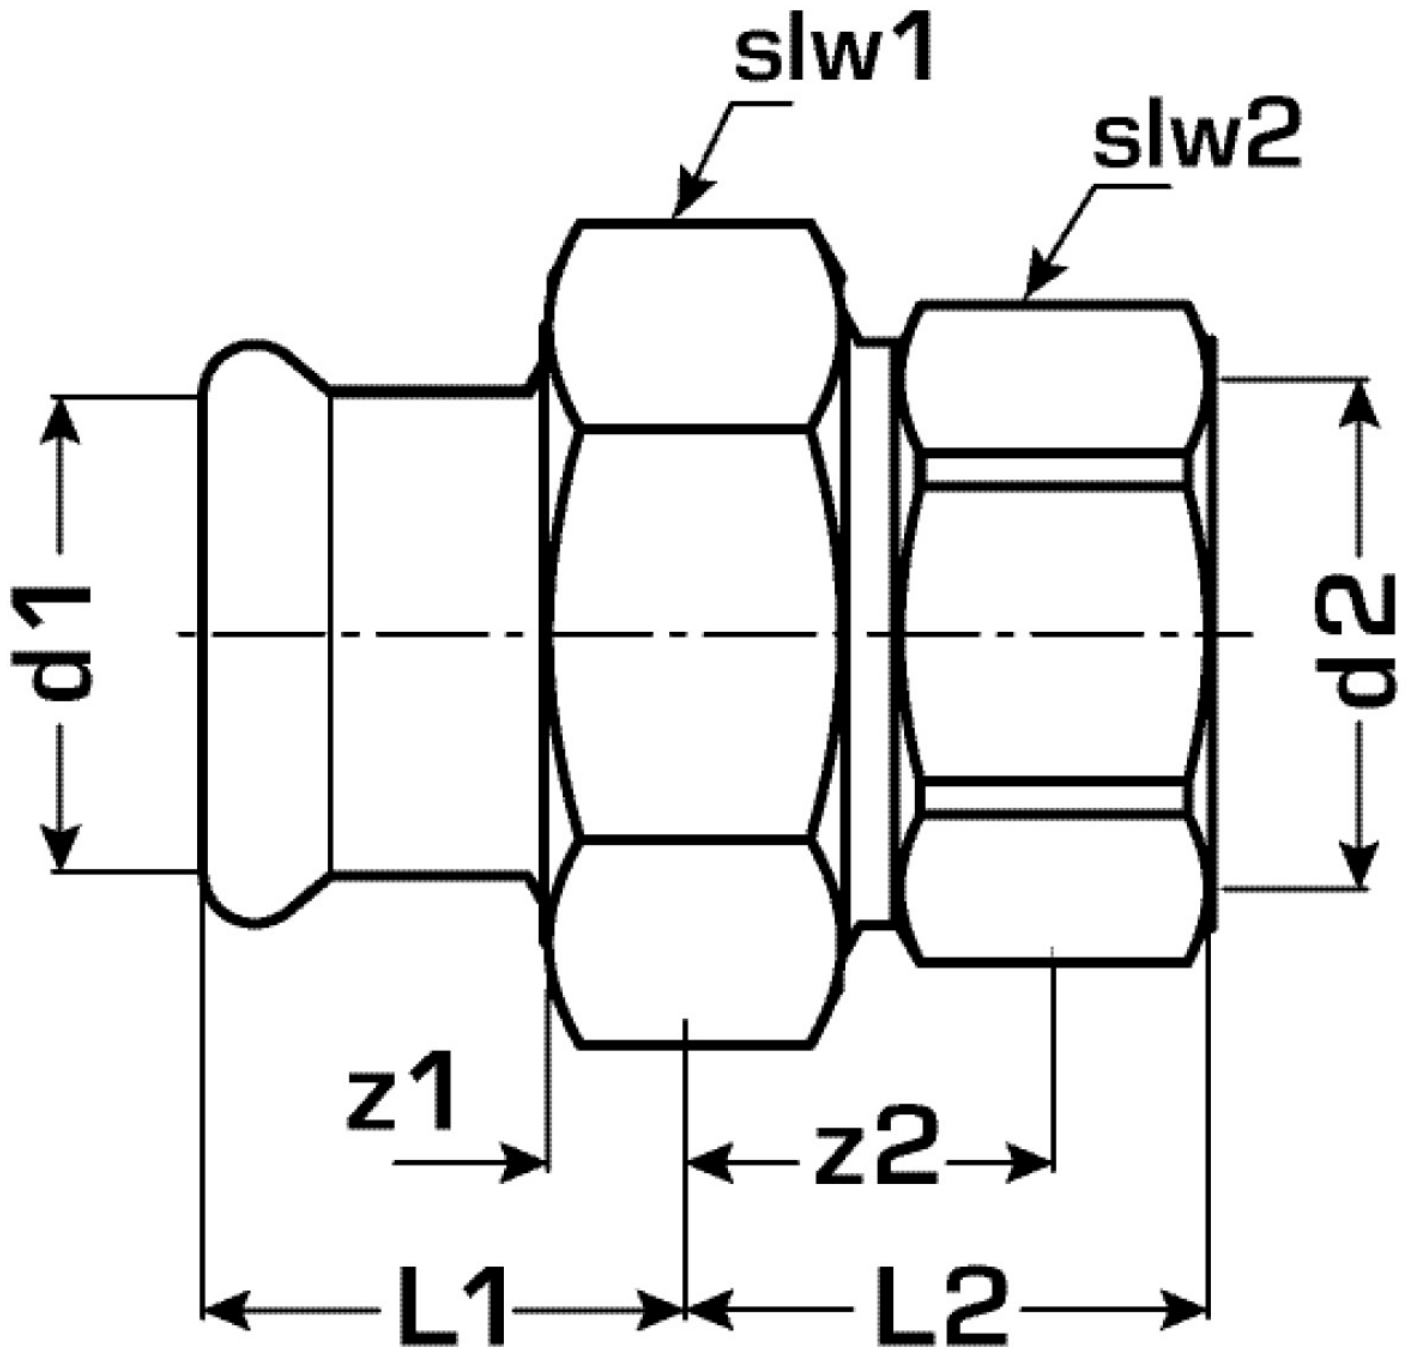

Art. No	label	d2	d1 mm	L1 mm	L2 mm	z1 mm	z2 mm	slw1 mm	slw2 mm
52742F06	35x5/4"	1 1/4"	35	36	38	9	17	56	50