


KELIT PEX

PEX03-1 KELIT DUO-PEX pipe insulation series 1 63+63x5.8

3040265

Areas of application

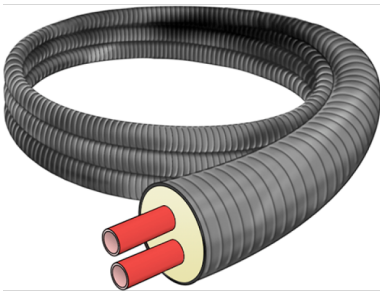

Medium pipe made from cross-linked polyethylene and coloured O₂ diffusion layer, SDR 11. Pipe connection compatible with standard connector

Application area: PN12.5 / 20°C - PN6 / 80°C - t_{max} 95°C

Thermal insulation: PUR foam complying with EN 253 / EN 15632, closed-cell, CFC-free

Jacket pipe: corrugated PE-LD pipe, seamlessly extruded, long-term-protected against UV radiation

Specifications


Technical properties

| | |
|---------------------|-------------|
| pipe weight | 5,30 kg/m |
| pipe contents | 2x 2,07 l/m |
| diameter inner tube | 63 mm |

Product information

| | |
|---------------------|--|
| casing DA | 182 |
| VPE1 | 1,00 LFM |
| VPE2 | 86,00 ROL |
| L | 86 m |
| weight | 5,280 KGM |
| text | KELIT DUO-PEX pipe insulation series 1 |
| INTRNR | 39173900 |
| main material group | KELIT PEX |
| material group | PEX pipe |
| code | PEX03-1 |

da

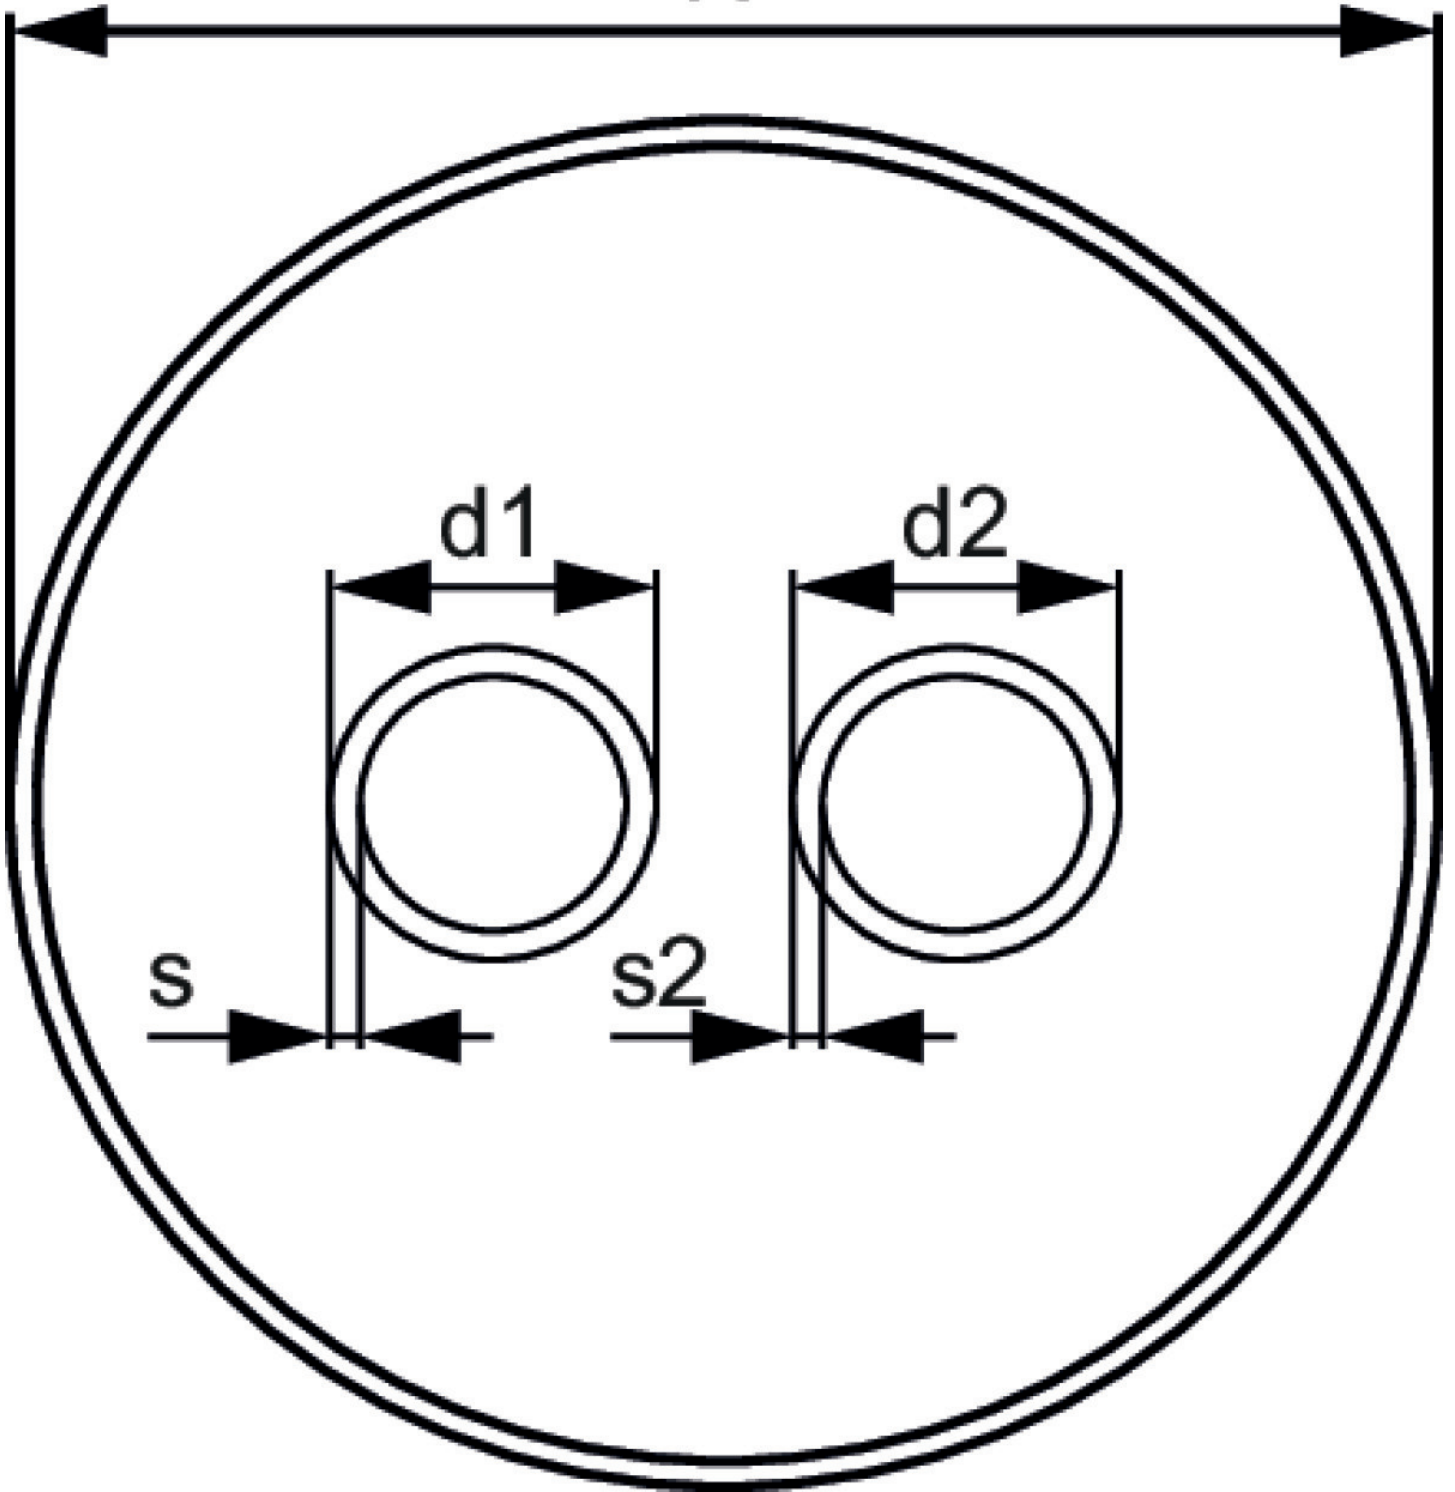

| Art. No | label | pipe contents l/m |
|---------|-----------|-------------------|
| 3040265 | 63+63x5.8 | 2x 2,07 |



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com