

# KELIT PEX

## PEX05 KELIT PEX pipe SANITARY 20x2.8

3041011

### Areas of application



Medium pipe: made from cross-linked polyethylene, SDR 7.4

Area of application: PN16 / 20°C - PN10 / 80°C - tmax 95°C

Thermal insulation: PUR foam complying with EN 15632, flexible, closed-cell, CFC-free

Jacket pipe: corrugated PE-LD pipe, seamlessly extruded, long-term-protected against UV radiation

# Specifications


## Technical properties

pipe weight	0,90 kg/m
pipe contents	0,16 l/m
diameter inner tube	20 mm

## Product information

casing DA	76
VPE1	1,00 LFM
VPE2	807,00 ROL
L	807
weight	0,950 KGM
text	KELIT PEX pipe SANITARY
INTRNR	39173900
main material group	KELIT PEX
material group	PEX sanitary-pipe
code	PEX05

da

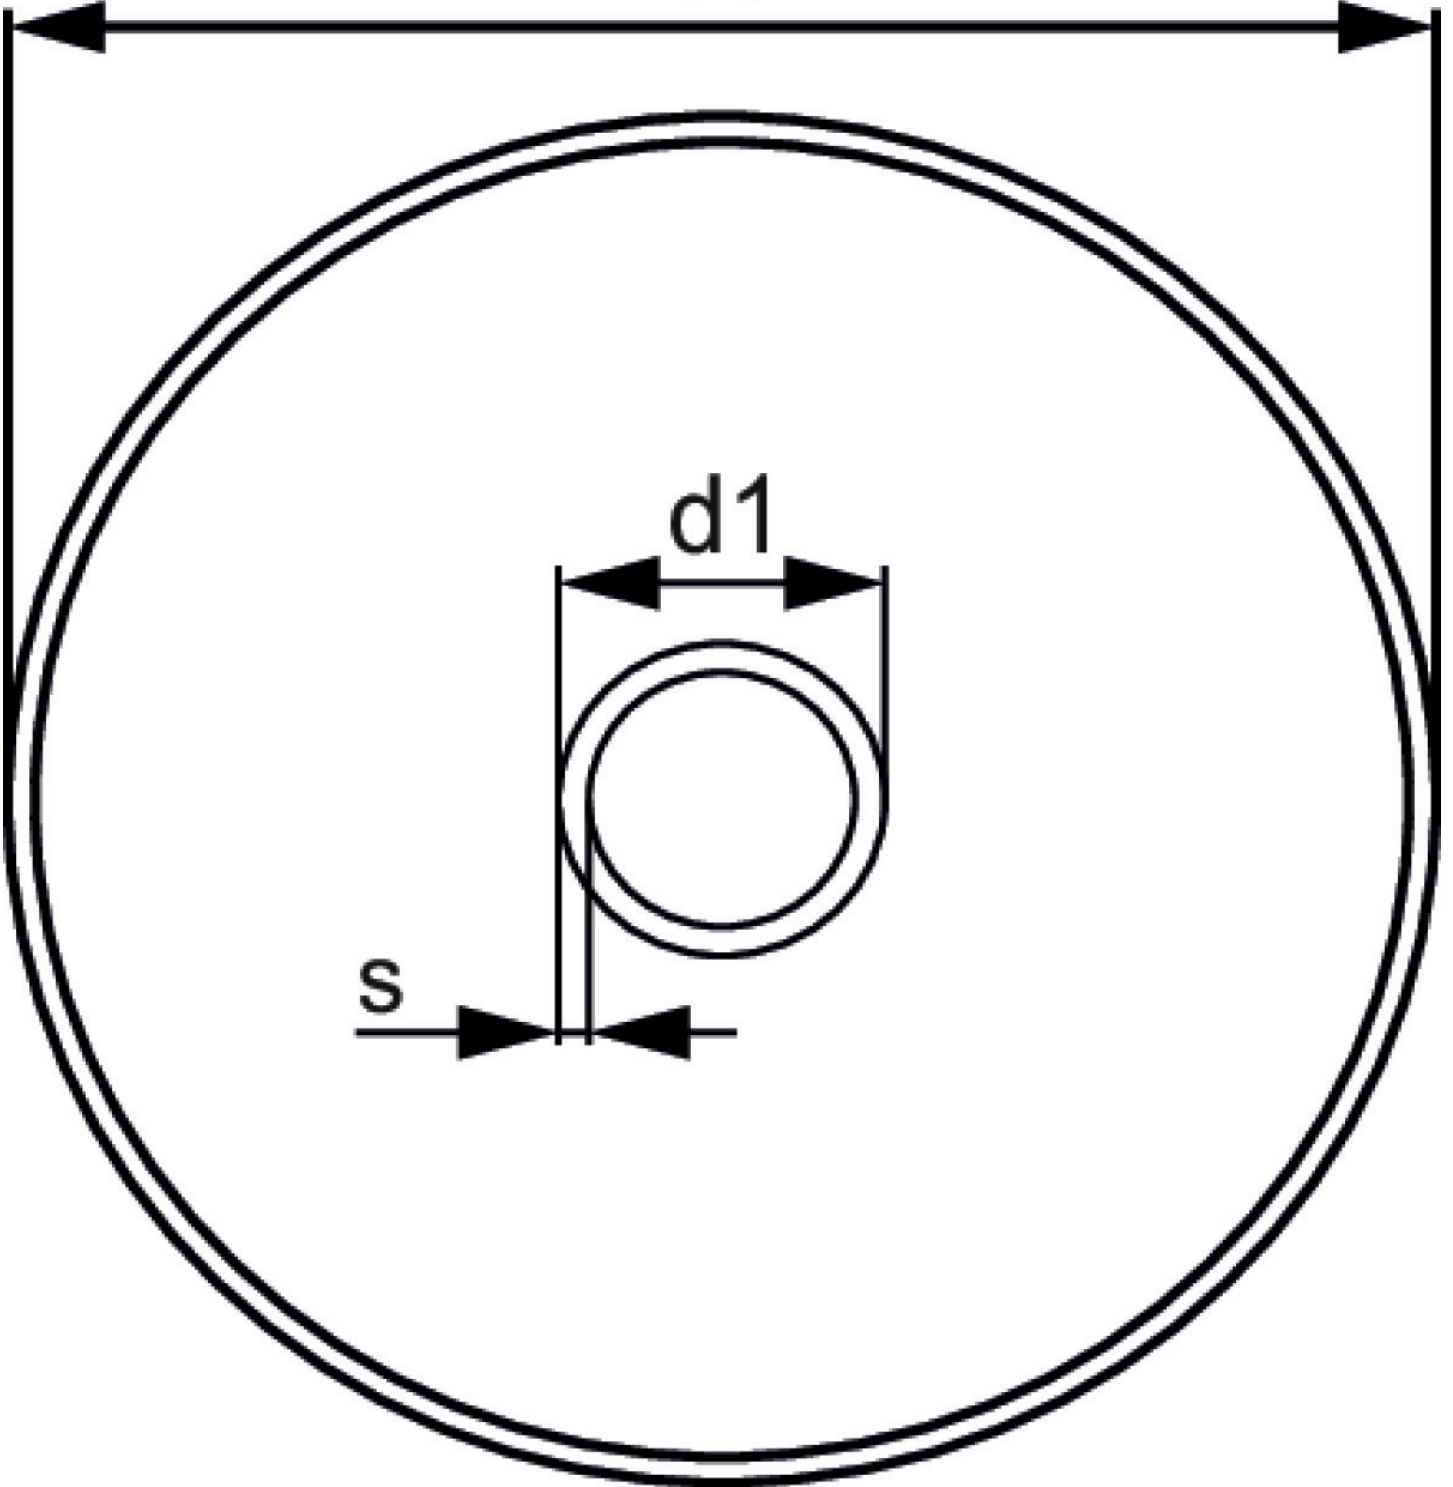

Art. No	label	pipe contents l/m
3041011	20x2.8	0,16



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)