


CLIMATE FIX

KC590 CLIMATEFIX manifold 5/4" 8 L:650mm

7961350

Areas of application

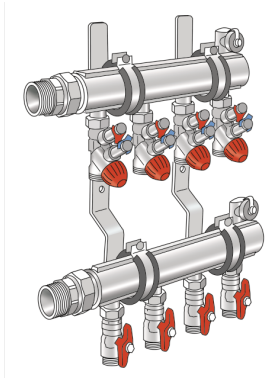

?Flow and return flow bars (5/4") with cooling and heating circuit outlets 3/4" Eurocone male, connection options through turnable valves at the connection points, with a bleeding and/or flushing connection at the highest point, connections with a pre-formed cap nut 6/4" flat-sealing and reduction nipple 5/4" male, manifold ends closed. At the flow compact valve, control valve, regulator valve, shut-off valve and measuring valve 3/4" Euro-cone male, precise regulation with adjusting tools of 0.5 - 9.0 l/min pre-settable, which unites the functions zone valve and line regulator valve. Flow and differential pressure measuring can be logged using a monitoring computer, top parts fit KM596 KELOX thermal motor, at the return flow ball valve 3/4" Euro-cone male, non-porous metallised brass, incl. sound-proofed steel consoles to fasten the manifold bars.

Application area: tmax. 80°C/6 bar



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL office@kekelit.com

www.kekelit.com

ATTENTION: WITHOUT KM220 Euro thread fitting!



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe



PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

Specifications

Product information

VPE1	1,00 KT1
weight	15,600 KGM
text	CLIMATEFIX manifold 5/4"
INTRNR	84818039
main material group	CLIMATEFIX
material group	CLIMATEFIX fittings
code	KC590

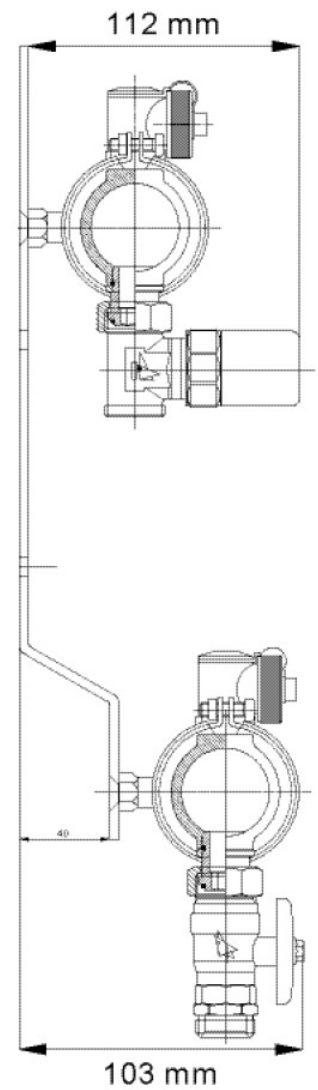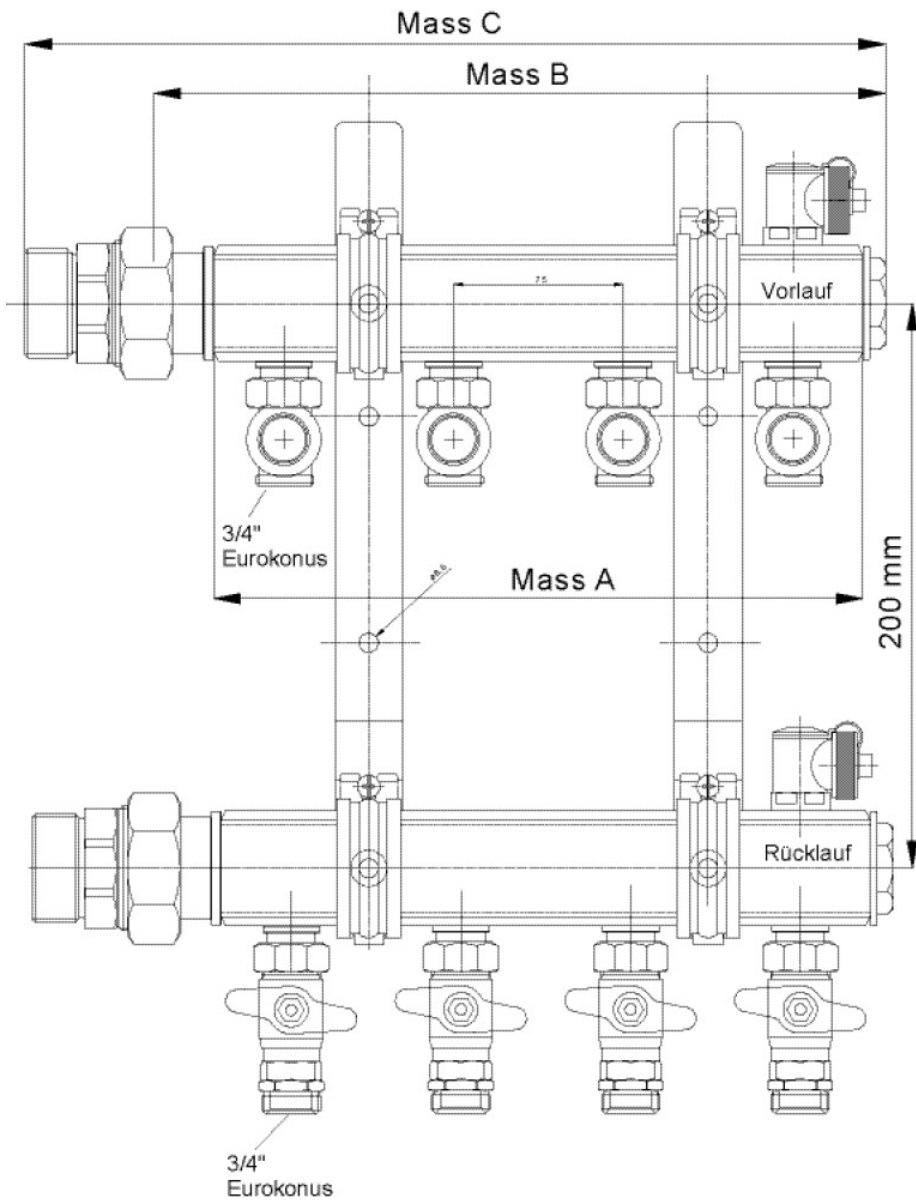

Art. No	label
7961350	8 L:650mm



KE KELIT GmbH
 A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe
PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com
 www.kekelit.com