


# KELOX<sub>FB</sub>

KM690U KELOX Control room thermostat, digital  
86x86x31mm

5881140

## Areas of application

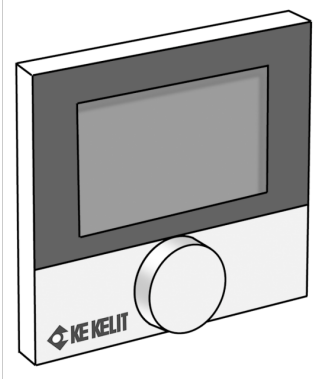

?Surface-mount room thermostat with backlit display for controlling 1 to 5 230V thermal motors (maximum of 3 W per thermal motor), for heating and cooling with changeover input, self-learning control system with selectable time-switching programs, KM560 dew point monitor or KM699 floor sensor can be connected

Operating voltage: 230V AC 50 Hz

Hysteresis: +/- 0.5 K at 17-24°C

Contact: 1 NCC

Setting range: 5°C - 30°C

Protection type/class: IP 20



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

Size: 86x86x31mm

Colour: white (RAL 9003)

Compatible with KM691 connection unit!

ATTENTION: Only in conjunction with KM596 KELOX thermal motor 230V!



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

# Specifications

Product information	
VPE1	1,00 KT1
VPE2	54,00 KT2
weight	0,105 KGM
text	KELOX Control room thermostat, digital
INTRNR	90321020
code	KM690U

Art. No	label
5881140	86x86x31mm