


KELOX_{FB}

KMP590E KELOX-PROTEC FB stainless steel push fitting manifold 10 L: 625mm

73171100

Areas of application

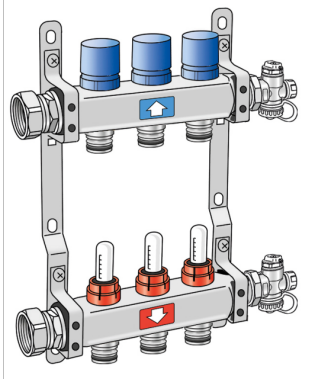

?Stainless steel flow and return flow bar with pluggable heating circuit outlets, with bleeding and emptying at the manifold end, connections with screwed-in 1" flat-sealing cap nut. Return flow valve bonnets suitable for KM596 KELOX thermal motor, flow water meter of 0.5-5.0 l/min adjustable, incl. sound-insulated steel consoles

Application area: tmax. 70°C/6 bar

ATTENTION: WITHOUT KMP552 PROTEC quick-push coupling!

Specifications

Article information

| | |
|-------------------|---|
| extendible | 1 |
|-------------------|---|

Product information

| | |
|-------------|----------|
| VPE1 | 1,00 KT1 |
|-------------|----------|

| | |
|-------------|-----------|
| VPE2 | 49,00 PAL |
|-------------|-----------|

| | |
|---------------|-----------|
| weight | 5,342 KGM |
|---------------|-----------|

| | |
|-------------|---|
| text | KELOX-PROTEC FB stainless steel push fitting manifold |
|-------------|---|

| | |
|---------------|----------|
| INTRNR | 84818099 |
|---------------|----------|

| | |
|-------------|---------|
| code | KMP590E |
|-------------|---------|



| Art. No | label | t mm | t mm | h mm |
|----------|-------------|------|------|------|
| 73171100 | 10 L: 625mm | 80 | 625 | 305 |