


KELOX_{FB}

KM590E KELOX FB manifold Manifold mount

1001000

Areas of application



?Feed and return flow bar with heating circuit outlets 3/4" euro cone with male thread, with bleeding at the highest point and draining, manifold ends closed, connections with pre-formed union nut 1" flat-sealing, manifold ends with 1" male thread, for screwing together individual manifold bars without additional connectors, on the feed line, pre-settable double-spindle valve, top parts to fit KM596 KELOX thermal motor, on the return flow water flow meter (0.5-2.5 l/min), non-porous metallised brass, incl. labelled plates for each heating circuit and sound-insulated metal consoles (1 circuit) without drain outlet, bleeding and metal console


Application area: tmax. 80°C/6 bar

ATTENTION: WITHOUT KM220 Euro thread fitting!

Specifications

Product information

| | |
|---------------|-------------------|
| VPE1 | 1,00 KT1 |
| weight | 0,200 KGM |
| text | KELOX FB manifold |
| INTRNR | 84818099 |
| code | KM590E |

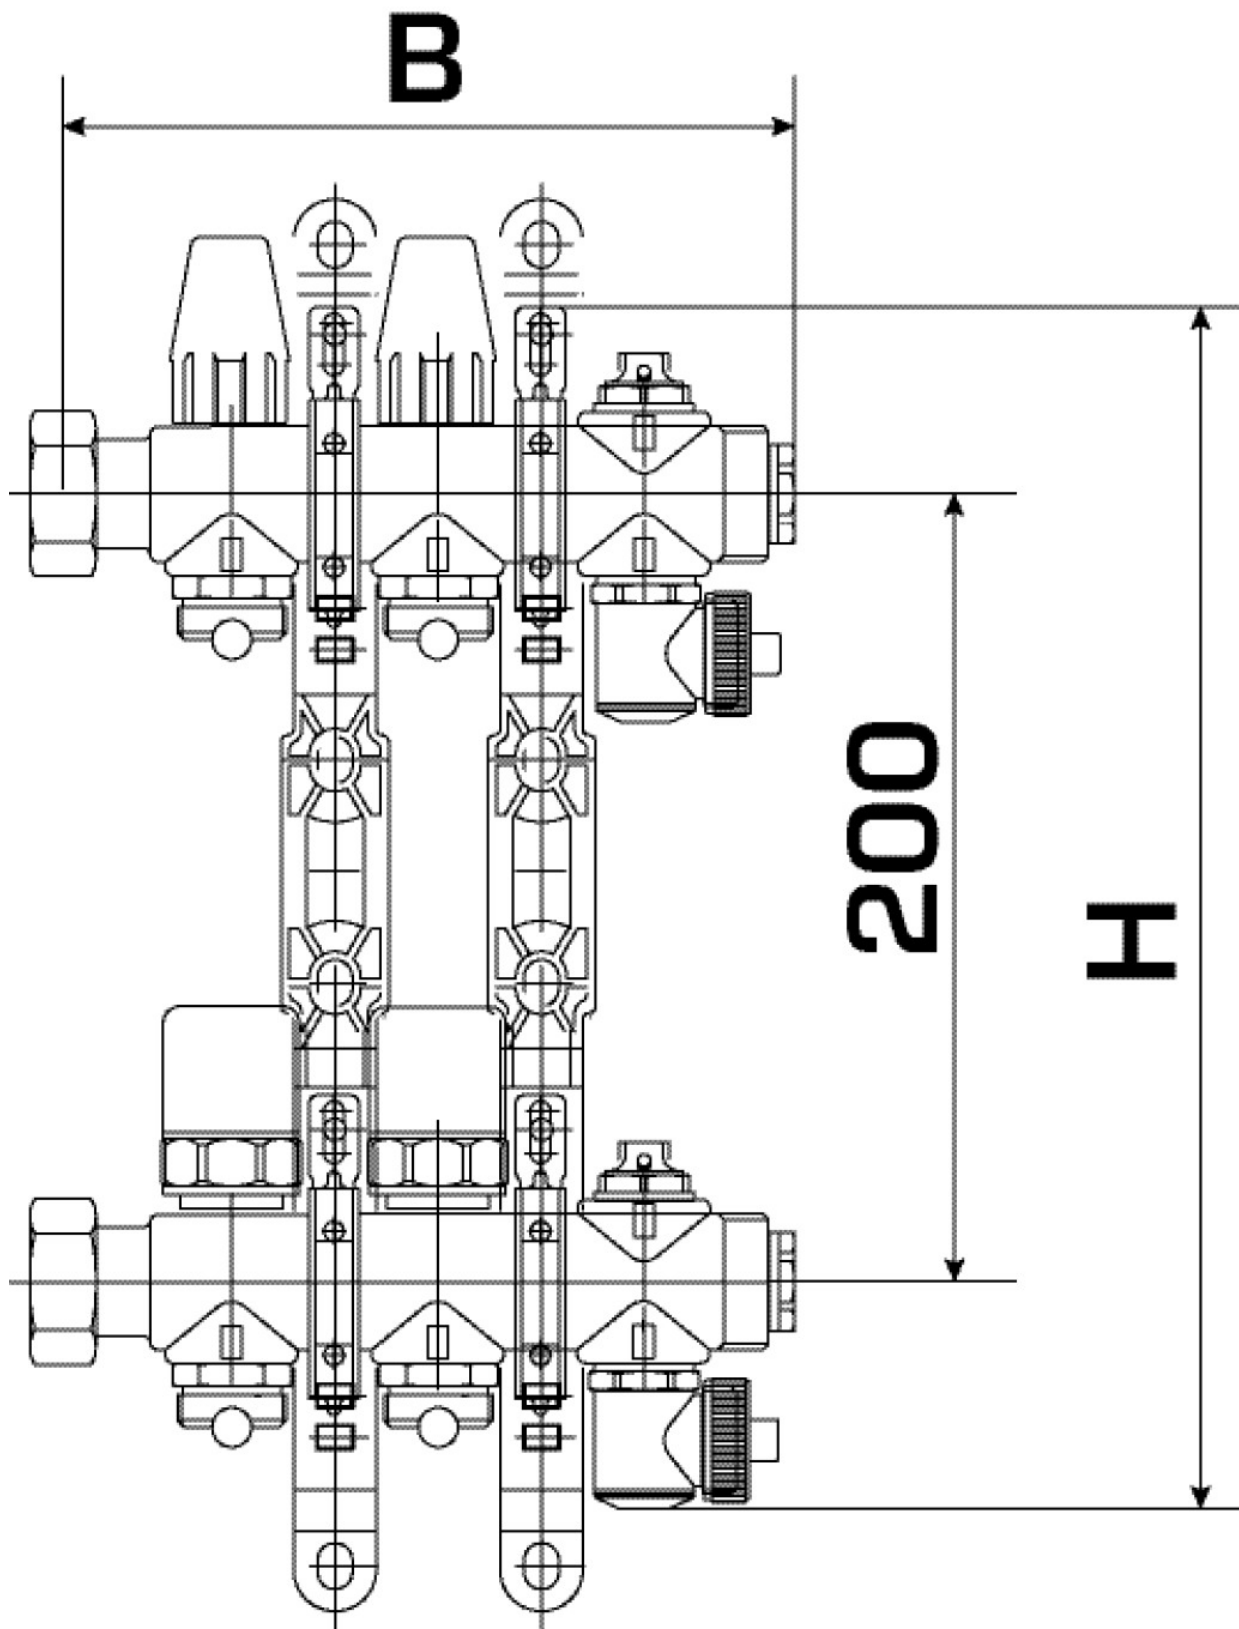

| Art. No | label |
|---------|----------------|
| 1001000 | Manifold mount |



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com