


KELOX_{FB}

KMU590E ?KELOX-ULTRAX FB manifold 12 RL
replacement bar L: 725mm

790260012

Areas of application

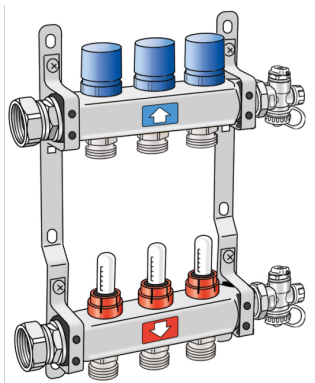

?Stainless steel flow and return flow bar with heating circuit outlets 3/4" Eurocone male, with bleeding and emptying at the manifold end, connections with screwed-in cap nut 1" flat-sealing. Return flow valve bonnets suitable for KM596 KELOX thermal motor, flow water meter of 0.5-5.0 l/min adjustable, incl. sound-insulated steel consoles
Application area: tmax. 70°C/6 bar

ATTENTION: WITHOUT KM220 Euro thread fitting!

Specifications

Product information

| | |
|---------------|---------------------------|
| VPE1 | 1,00 KT1 |
| weight | 3,070 KGM |
| text | ?KELOX-ULTRAX FB manifold |
| INTRNR | 84818099 |
| code | KMU590E |



Art. No

label

790260012

12 RL replacement bar L: 725mm