


# KELOX<sub>FB</sub>

KMP590D KELOX-PROTEC FB regulating push fitting manifold 4 L: 325mm

73172040

## Areas of application

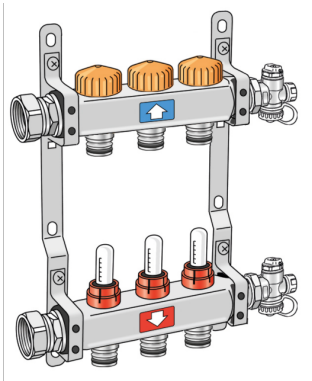

?Stainless steel flow and return flow bar with pluggable heating circuit outlets, with bleeding and emptying at the manifold end, connections with screwed-in 1" flat-sealing cap nut. Automatic flow control and hydraulic balancing of the individual return flow valves, suitable for KM596 KELOX thermal motor, feed flow water flow meter adjustable to 0.5-5.0 l/min, including soundproofed steel consoles

Application area: tmax. 70°C/6 bar

ATTENTION: WITHOUT KMP552 PROTEC quick-push coupling!

# Specifications

## Product information

|               |  |
|---------------|--|
| <b>VPE1</b>   | 1,00 KT1   |
| <b>VPE2</b>   | 119,00 PAL                                       |
| <b>weight</b> | 2,850 KGM  |
| <b>text</b>   | KELOX-PROTEC FB regulating push fitting manifold |
| <b>INTRNR</b> | 84818099   |
| <b>code</b>   | KMP590D  |



| Art. No  | label      | t mm | t mm | h mm |
|----------|------------|------|------|------|
| 73172040 | 4 L: 325mm | 70   | 375  | 336  |