


# TRI2008 KETRIX PE pipe - PN16 125x17.1

3019198

## Areas of application

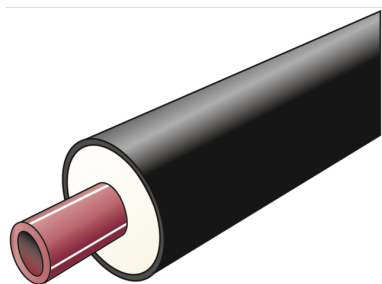

Pre-insulated industrial piping system based on ÖNORM EN ISO 15874

Medium pipe: d20-125 = TRI08, adhesion-pretreated

Application area: 20°C/16 bar - from -30°C to +40°C/10 bar

Insulation: PUR rigid foam

Jacket pipe: PE-HD

Length: 6m

# Specifications

## Product information

<b>casing DA</b>	250
<b>VPE1</b>	6,00 STG
<b>L</b>	6 m
<b>weight</b>	11,470 KGM
<b>text</b>	KETRIX PE pipe - PN16
<b>INTRNR</b>	39172290
<b>main material group</b>	KETRIX CX/PE
<b>material group</b>	KETRIX CX/PE pipes and fittings
<b>code</b>	TRI2008

Art. No	label
---------	-------

3019198	125x17.1
---------	----------