


# KELOX

## KMW410 KELOX-ULTRAX-W coupling 20/20

71300DD0

### Areas of application

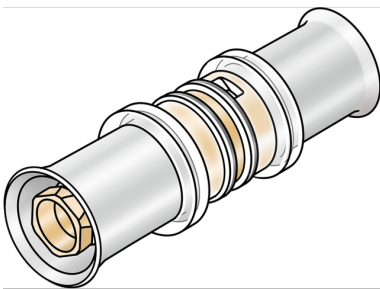

?Zeta value-optimised press-fit coupling, equal or reduced, made from dezincification-resistant (DZR) brass, including support sleeves with O-rings and stainless steel press-fit sleeves "leak before pressed", audible leakage signal at air-pressure testing

### Approvals:



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

# Specifications

## Article information


|               |            |
|---------------|------------|
| port 1        | Pressmuffe |
| port 2        | Pressmuffe |
| execution     | 1-part     |
| design        | gerade     |
| press contour | U          |

## Technical properties

|                                    |        |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

## Product information

|                     |                         |
|---------------------|-------------------------|
| VPE1                | 10,00 SA1               |
| VPE2                | 80,00 KT1               |
| VPE3                | 4800,00 PAL             |
| weight              | 0,073 KGM               |
| text                | KELOX-ULTRAX-W coupling |
| INTRNR              | 74122000                |
| main material group | KELOX                   |
| code                | KMW410                  |

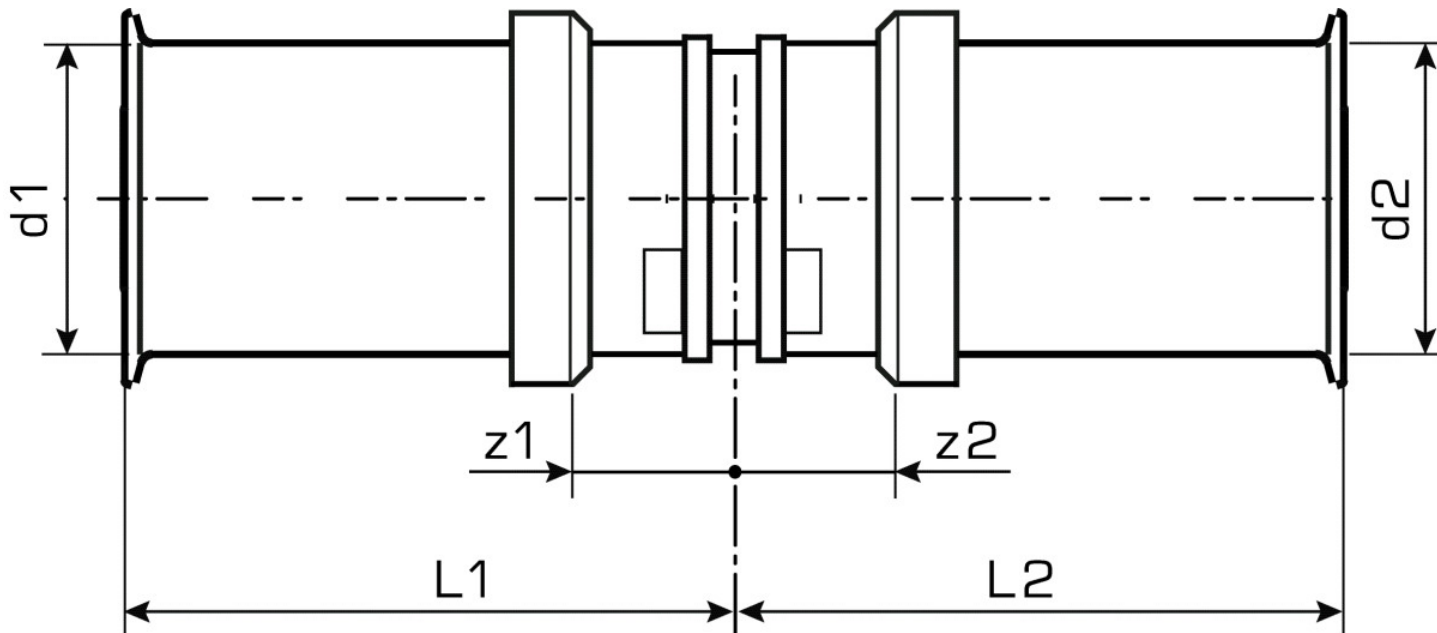

| Art. No  | label | d1 mm | d2 mm | L1 mm | L2 mm | z1 mm | z2 mm |
|----------|-------|-------|-------|-------|-------|-------|-------|
| 71300DD0 | 20/20 | 20    | 20    | 34,5  | 34,5  | 9     | 9     |