


KELOX

KMW410 KELOX-ULTRAX-W coupling 25/20

71300ED0

Areas of application

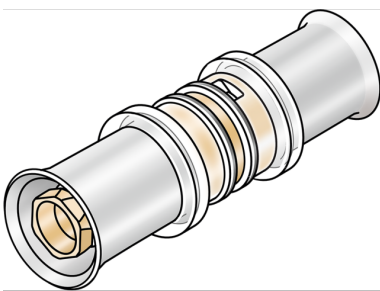

?Zeta value-optimised press-fit coupling, equal or reduced, made from dezincification-resistant (DZR) brass, including support sleeves with O-rings and stainless steel press-fit sleeves "leak before pressed", audible leakage signal at air-pressure testing

Approvals:



Specifications

Article information


port 1	Pressmuffe
port 2	Pressmuffe
execution	1-part
design	gerade
press contour	U

Technical properties

maximum working pressure at 20 ° C	16 bar
------------------------------------	--------

Product information

VPE1	5,00 SA1
VPE2	40,00 KT1
VPE3	3200,00 PAL
weight	0,095 KGM
text	KELOX-ULTRAX-W coupling
INTRNR	74122000
main material group	KELOX
code	KMW410

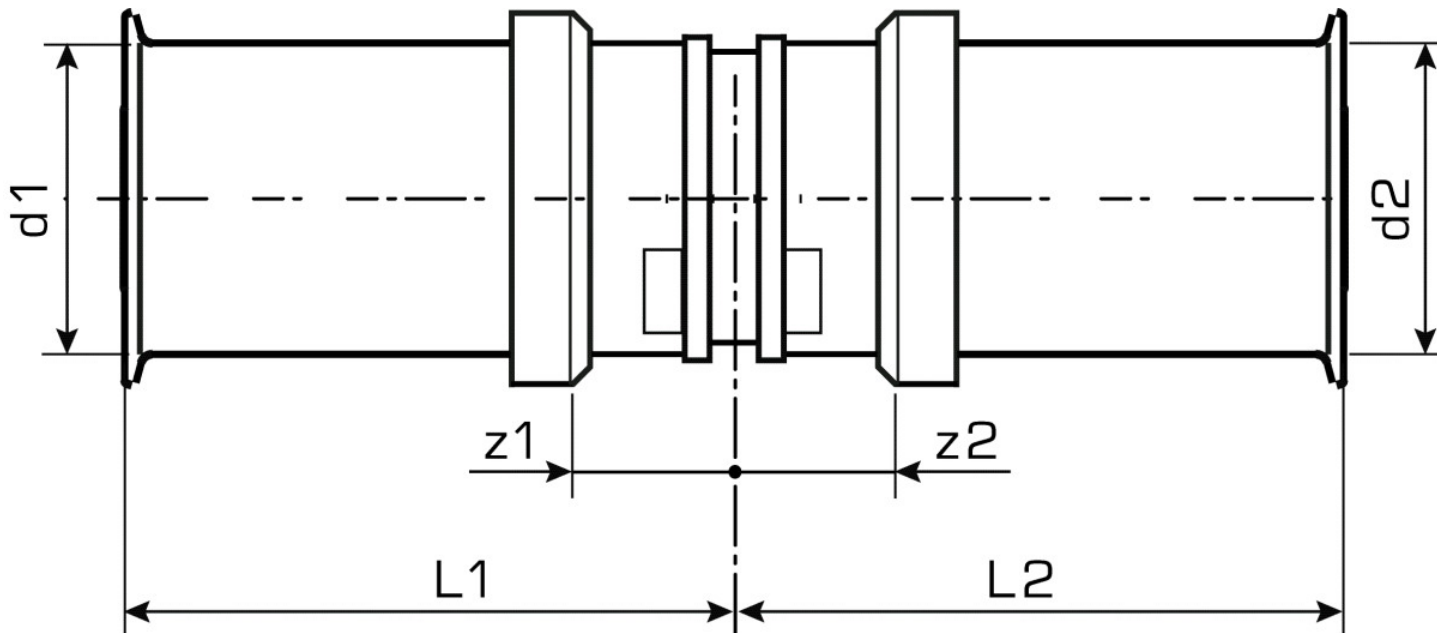

Art. No	label	d1 mm	d2 mm	L1 mm	L2 mm	z1 mm	z2 mm
71300ED0	25/20	25	20	39,5	35,5	9,5	9,5