


# KELOX

## KMW451 KELOX-ULTRAX-W union with male thread 20x3/4"

71441D04

### Areas of application

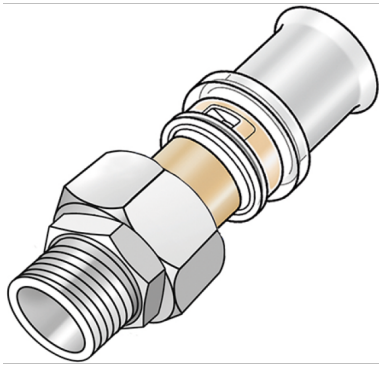

?Zeta value-optimised press-fit union with male thread made from stainless steel, thread as per ÖNORM EN 10226, for connecting to fittings made of dezincification resistant brass (DZR); incl. support sleeves with O-rings and stainless steel press-fit sleeves "leak before pressed", audible leakage signal at air-pressure testing, flat-sealing including seal

## Approvals:



# Specifications

## Article information


port 1	Pressmuffe
port 2	Außengewinde zylindrisch BSPP (ISO 228-1)
design	gerade
press contour	U

## Technical properties

maximum working pressure at 20 ° C	16 bar
------------------------------------	--------

## Product information

VPE1	10,00 SA1
VPE2	100,00 KT1
weight	0,190 KGM
text	KELOX-ULTRAX-W union with male thread
INTRNR	74122000
main material group	KELOX
code	KMW451

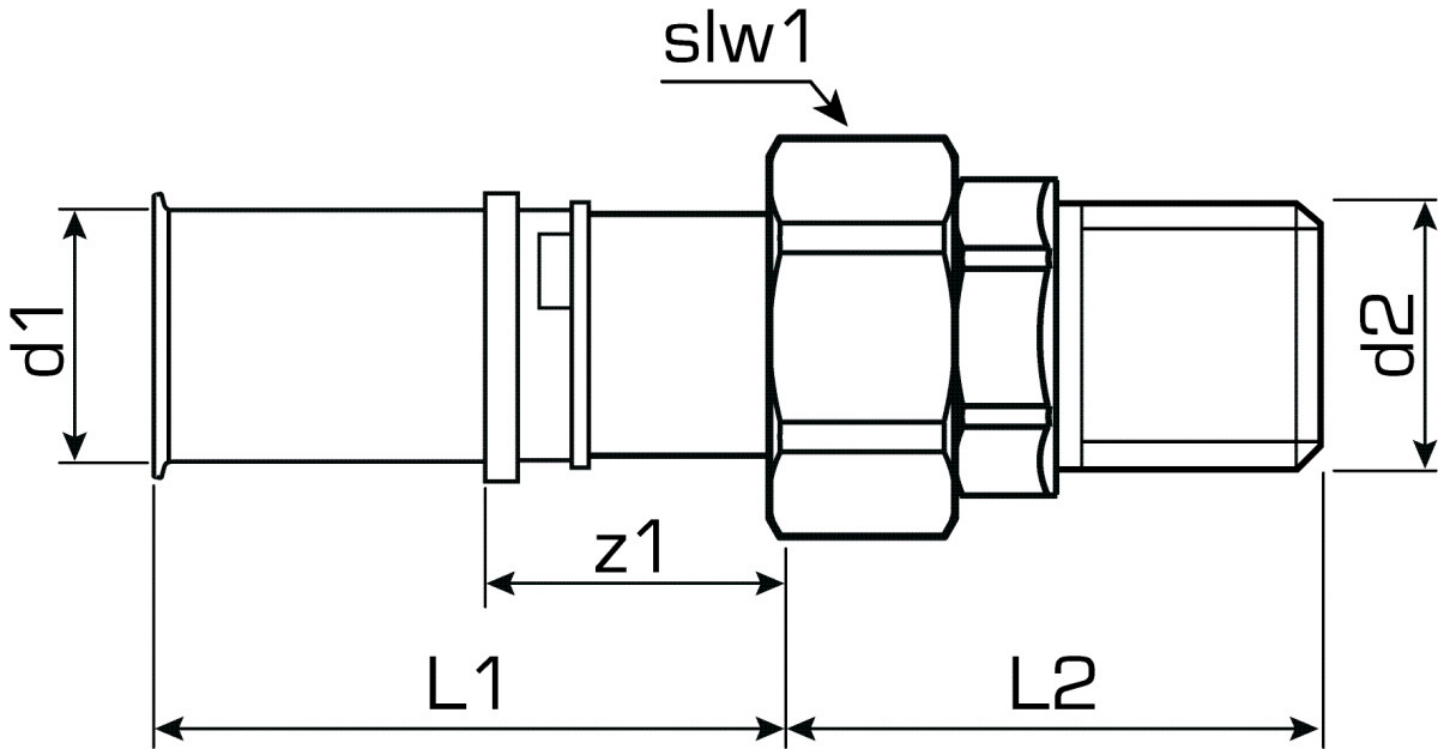

Art. No	label	d2	d1 mm	L1 mm	L2 mm	z1 mm
71441D04	20x3/4"	3/4 Zoll (20)	20	51,5	35,5	13,5