


KELOX

KMW455 KELOX-ULTRAX-W screw fitting with female thread 25x3/4"

71403E04

Areas of application

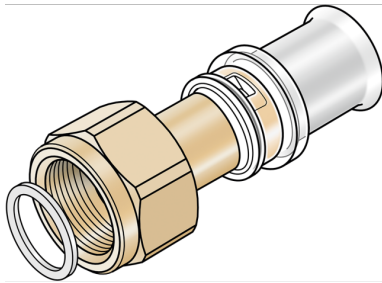

?Zeta value-optimised press-fit screw fitting with female thread, for connecting to fittings, e.g. filters manifolds, pumps, etc., made of dezincification resistant brass (DZR); incl. support sleeves with O-rings and stainless steel press-fit sleeves "leak before pressed", audible leakage signal at air-pressure testing, flat-sealing including seal

Approvals:



Specifications

Article information


port 1	Pressmuffe
port 2	Überwurfmutter
design	gerade
press contour	U

Technical properties

maximum working pressure at 20 ° C	16 bar
------------------------------------	--------

Product information

VPE1	5,00 SA1
VPE2	40,00 KT1
VPE3	2400,00 PAL
weight	0,148 KGM
text	KELOX-ULTRAX-W screw fitting with female thread
INTRNR	74122000
main material group	KELOX
code	KMW455

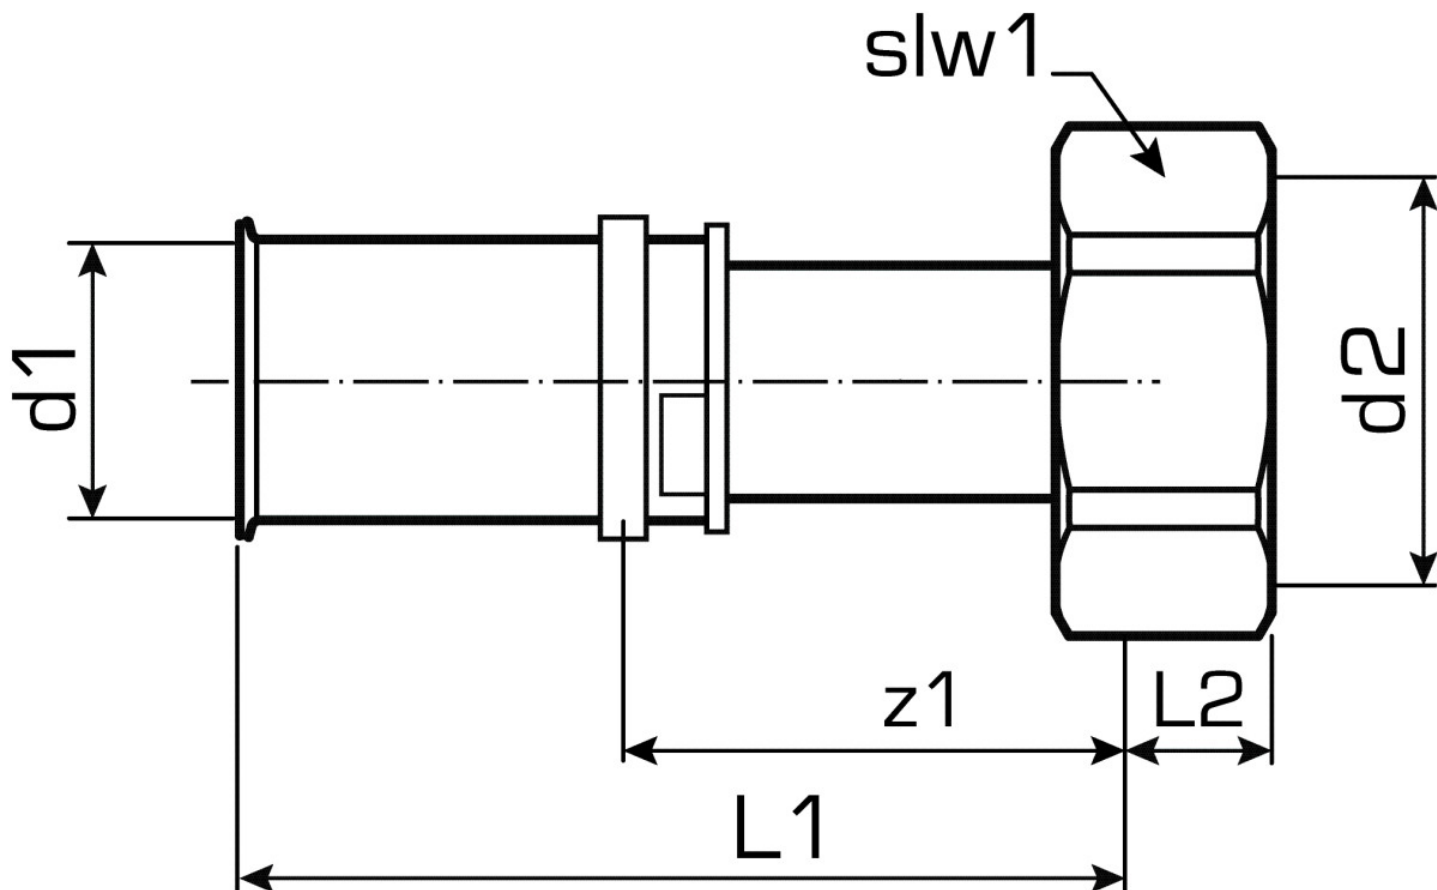

Art. No	label	d2	d1 mm	L1 mm	L2 mm	z1 mm	z2 mm	slw1 mm	slw2 mm
71403E04	25x3/4"	3/4 Zoll (20)	25	66,5	8	36,5	23,5	34	42