


KELOX

KMW455 KELOX-ULTRAX-W screw fitting with female thread 32x5/4"

71403F06

Areas of application

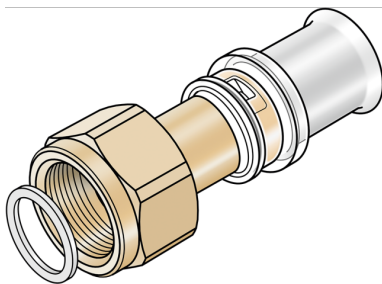

?Zeta value-optimised press-fit screw fitting with female thread, for connecting to fittings, e.g. filters manifolds, pumps, etc., made of dezincification resistant brass (DZR); incl. support sleeves with O-rings and stainless steel press-fit sleeves "leak before pressed", audible leakage signal at air-pressure testing, flat-sealing including seal

Approvals:



Specifications

Article information


| | |
|---------------|----------------|
| port 1 | Pressmuffe |
| port 2 | Überwurfmutter |
| design | gerade |
| press contour | U |

Technical properties

| | |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

Product information

| | |
|---------------------|---|
| VPE1 | 5,00 SA1 |
| VPE2 | 40,00 KT1 |
| VPE3 | 2400,00 PAL |
| weight | 0,180 KGM |
| text | KELOX-ULTRAX-W screw fitting with female thread |
| INTRNR | 74122000 |
| main material group | KELOX |
| code | KMW455 |

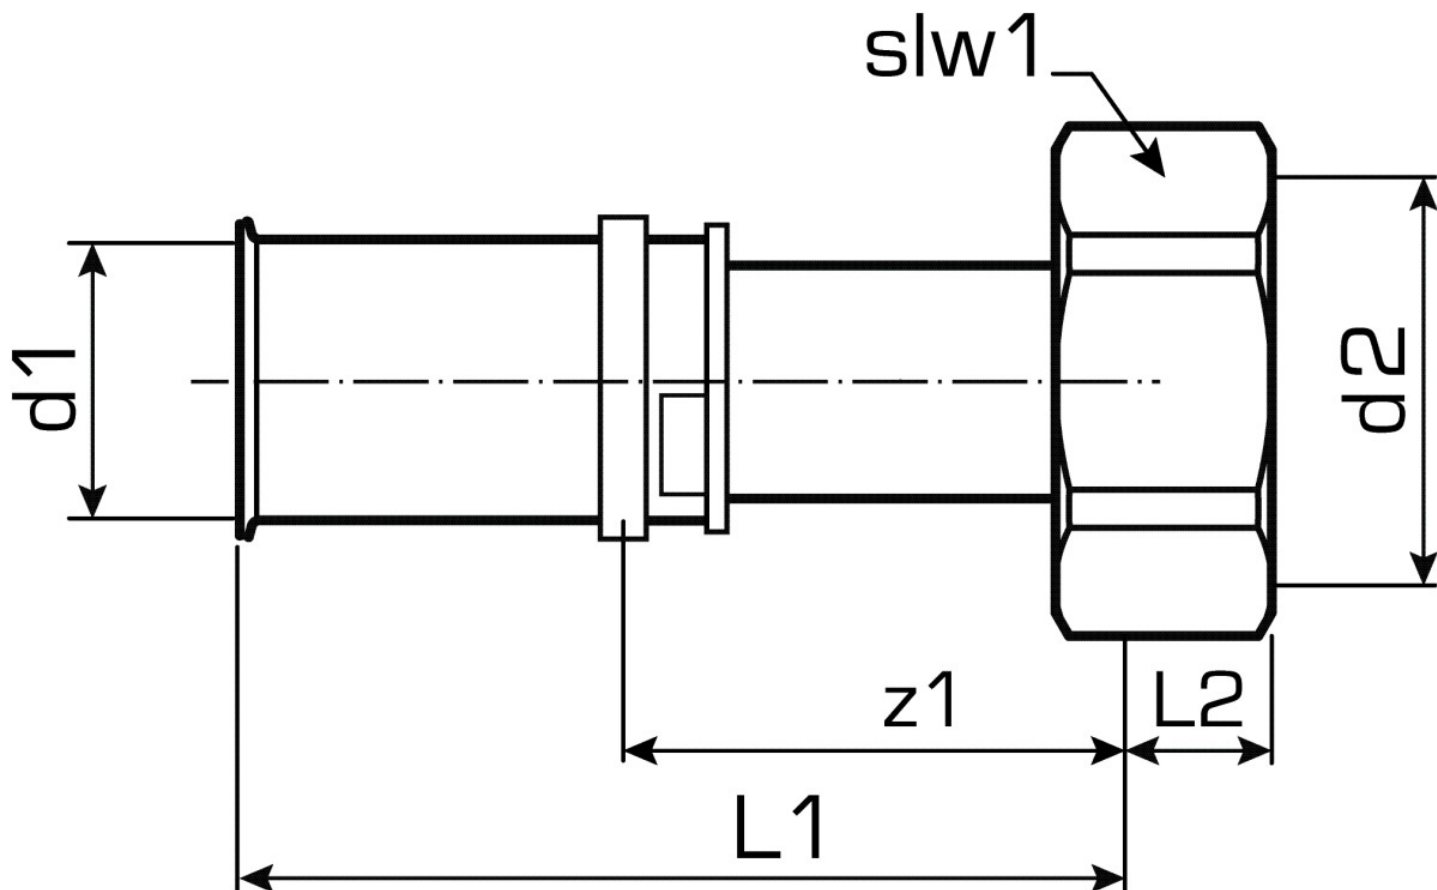

| Art. No | label | d2 | d1 mm | L1 mm | z2 mm | slw2 mm |
|----------|---------|--------|-------|-------|-------|---------|
| 71403F06 | 32x5/4" | 1 1/4" | 32 | 30 | 24 | 55 |