


# KELOX

## KMW489 KELOX-ULTRAX-W - STEELFIX adapter 16/15

71472BB0

### Areas of application

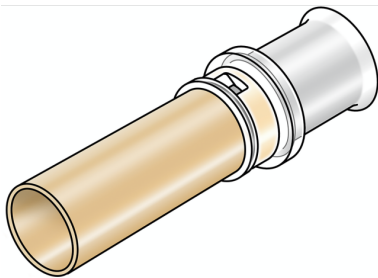

?Zeta value-optimised press-fit adapter, straight, Copperfix pipe dimension to KELOX, pressing socket, made from dezincification-resistant (DZR) brass, including support sleeves with O-rings and stainless steel press-fit sleeves "leak before pressed", audible leakage signal at air-pressure testing  
**ATTENTION!** Connection to pipe end only suitable as a compression fitting or press-fit connection!

## Approvals:



# Specifications

## Article information


port 1	Pressmuffe
port 2	Zapfen/Rohrende
design	gerade
press contour	U

## Technical properties

maximum working pressure at 20 ° C	16 bar
------------------------------------	--------

## Product information

VPE1	5,00 SA1
VPE2	50,00 KT1
VPE3	5000,00 PAL
weight	0,045 KGM
text	KELOX-ULTRAX-W - STEELFIX adapter
INTRNR	74122000
main material group	KELOX
code	KMW489

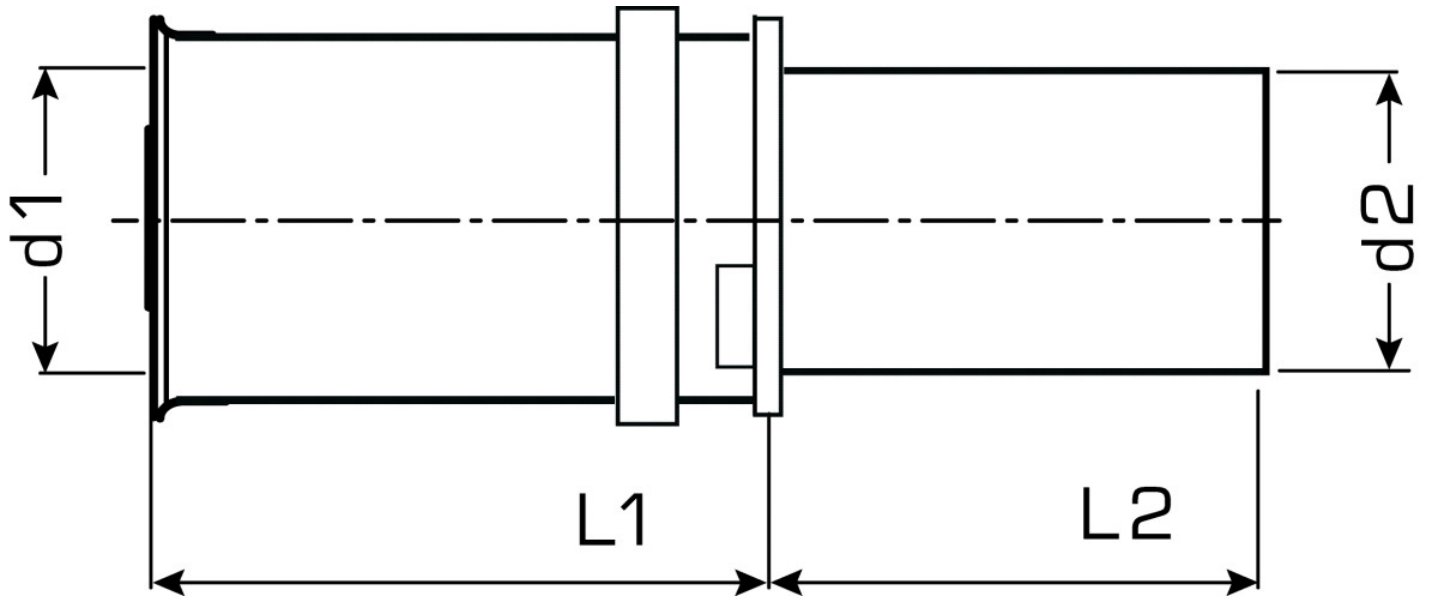

Art. No	label	d1 mm	d2 mm	L1 mm	L2 mm	z1 mm
71472BB0	16/15	16	15	34,5	30,5	9,5