


# KELOX

## KMW489 KELOX-ULTRAX-W - STEELFIX adapter 20/18

71472DD0

### Areas of application

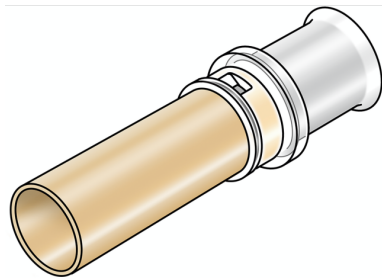

?Zeta value-optimised press-fit adapter, straight, Copperfix pipe dimension to KELOX, pressing socket, made from dezincification-resistant (DZR) brass, including support sleeves with O-rings and stainless steel press-fit sleeves "leak before pressed", audible leakage signal at air-pressure testing  
**ATTENTION!** Connection to pipe end only suitable as a compression fitting or press-fit connection!

## Approvals:



# Specifications

## Article information


|               |                 |
|---------------|-----------------|
| port 1        | Pressmuffe      |
| port 2        | Zapfen/Rohrende |
| design        | gerade          |
| press contour | U               |

## Technical properties

|                                    |        |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

## Product information

|                     |                                   |
|---------------------|-----------------------------------|
| VPE1                | 5,00 SA1                          |
| VPE2                | 40,00 KT1                         |
| VPE3                | 4000,00 PAL                       |
| weight              | 0,050 KGM                         |
| text                | KELOX-ULTRAX-W - STEELFIX adapter |
| INTRNR              | 74122000                          |
| main material group | KELOX                             |
| code                | KMW489                            |

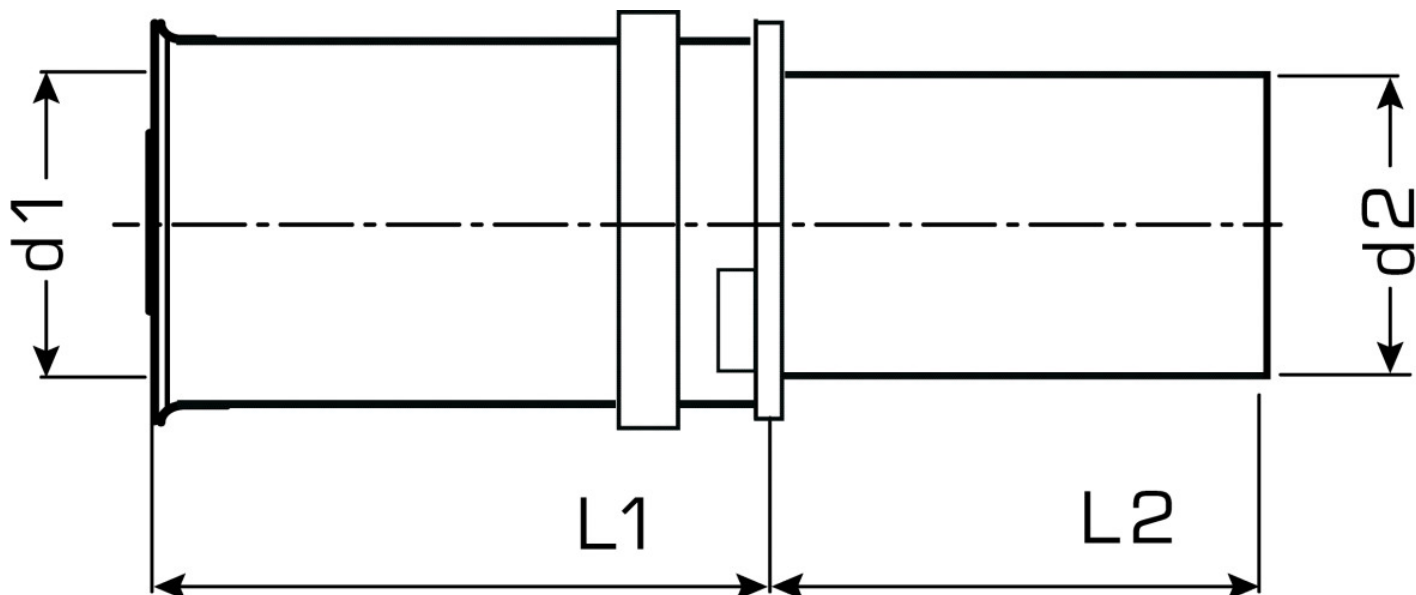

| Art. No  | label | d1 mm | d2 mm | L1 mm | L2 mm |
|----------|-------|-------|-------|-------|-------|
| 71472DD0 | 20/18 | 20    | 18    | 25    | 41    |